


Bulkhead Jack-Jack Adapter

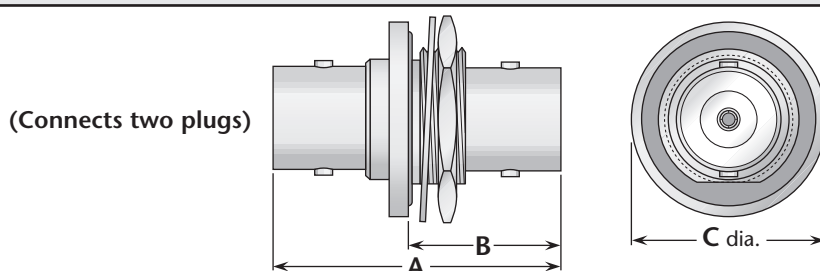

Dimensions			Max. Panel	Mounting Figure	Plating		Delta P/N
A	B	C			Body	Contact	
1.50	.855	1.00	.200	51	Nickel	Silver (C)	UG-1138A/U*
1.50	.855	1.00	.200	51	Nickel	Silver (C)	1426-000-N511

Straight, Right Angle, and Tee Adapters

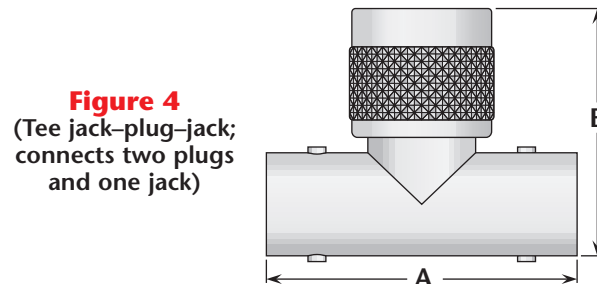
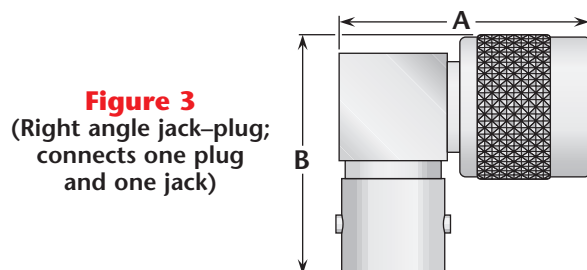
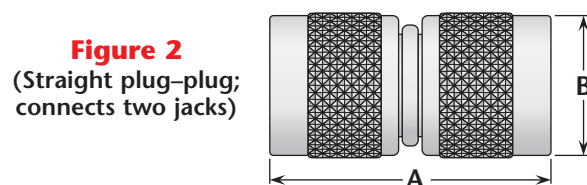
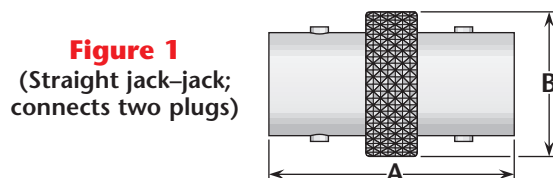


Figure	Dimensions		Plating		Delta P/N
	A	B	Body	Contact	
1	1.28	.75	Nickel	Silver (C)	UG-643/U
2	1.45	.75	Nickel	Silver (C)	UG-642A/U
3	1.25	1.16	Nickel	Silver (C)	UG-567A/U
4	1.52	1.28	Nickel	Silver (C)	UG-566A/U

Dust Caps

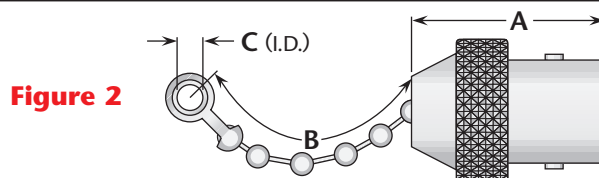
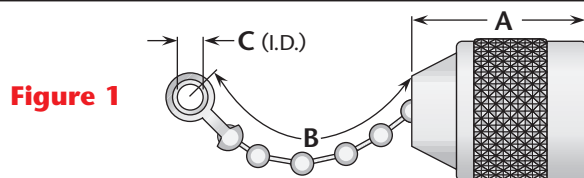


Figure	Dimensions			Features	Plating		Delta P/N
	A	B	C		Body	Contact	
1	.91	2.50	.144	Bead chain	Nickel	—	MX-1142A/U
2	.89	3.50	.144	Bead chain	Nickel	—	MX-1143A/U

*Hermetically sealed. • See page 203 for mounting dimensions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.