


Bulkhead Jack-Jack Adapter

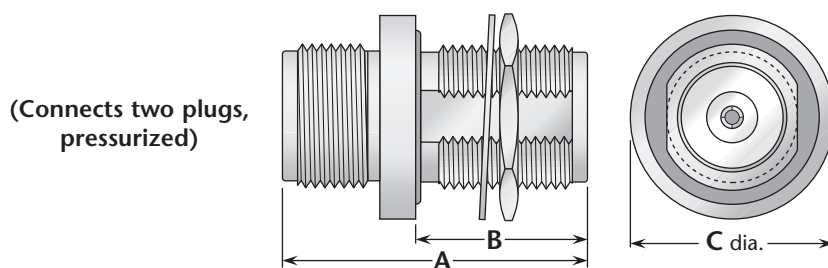

Dimensions			Max. Panel	Mounting Figure	Plating		Delta P/N
A	B	C			Body	Contact	
1.94	1.06	1.06	.25	69	Nickel	Silver (C)	UG-1019A/U

Straight Adapters

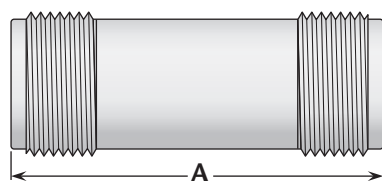


Figure 1
(Straight jack-jack;
connects two plugs)




Figure 2
(Straight plug-jack; connects one
plug and one jack)

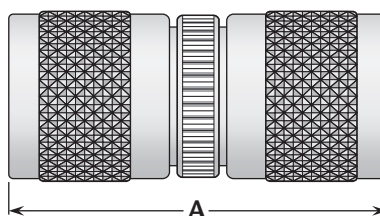


Figure 3
(Straight plug-plug;
connects two jacks)

Figure	Dimensions		Plating		Delta P/N
	A	B	Body	Contact	
1	2.00	—	Nickel	Silver (C)	1628-000-N000
2	1.63	.75	Nickel	Silver (C)	1634-000-N001
3	1.94	—	Nickel	Silver (C)	1627-000-N000

See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact.
See page 6 for alternate body plating information.