
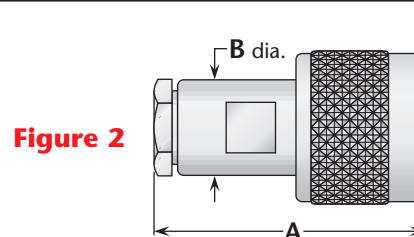


N70 Configurations



Straight Cable Plugs	89	Right Angle Panel Jack Receptacles	90
Straight Cable Jacks	89	Panel Plug Receptacles.....	90
Bulkhead Cable Jacks	89	Bulkhead Jack Receptacles	90
Panel Jack Receptacles (square flange)	90	In-Series Adapters	91

Straight Plug—Military Clamp for Flexible Cable

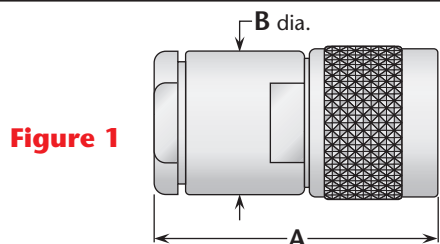



Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2B, 3B	1	1.80	.69	Nickel	Silver	UG-94A/U	C/01
7	2	1.38	.50	Nickel	Silver	1801-021-N000	A/02

Straight Jack—Military Clamp for Flexible Cable

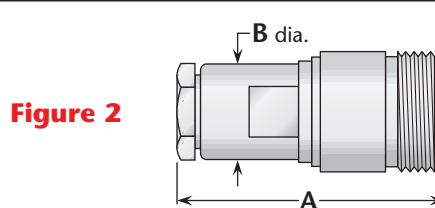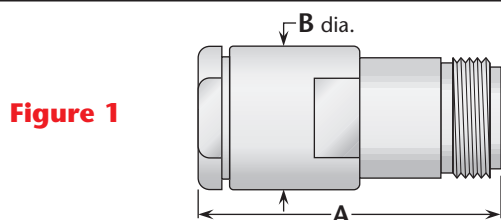

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2B, 3B	1	1.88	.69	Nickel	Gold	UG-95A/U	C/08
7	2	1.41	.50	Nickel	Silver	1808-021-N000	A/02

Bulkhead Jacks—for Flexible Cable

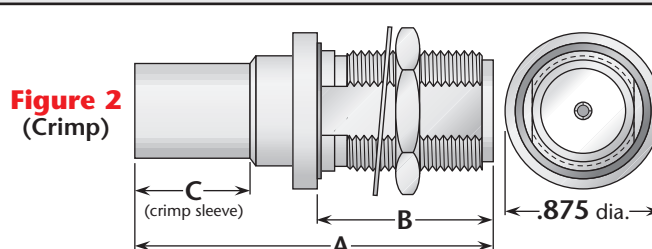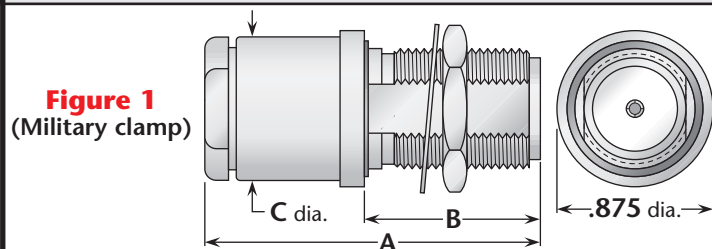

Cable Group	Fig.	Dimensions			Mounting Figure	Max. Panel	Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C			Body	Contact		
2B, 3B	1	1.84	.92	.69	72	.25	Nickel	Gold	1816-003-N720	C/08
7	1	1.47	.92	.50	72	.25	Nickel	Silver (C)	1816-021-N721	A/14
2B, 3B	2	1.84	.92	.60	72	.25	Nickel	Gold	1819-003-N720	B/03
7	2	1.59	.92	.50	72	.25	Nickel	Silver	1819-020-N720	B/14

See page 204 for cable groups. • Assembly procedures start on page 205. • See page 203 for mounting dimensions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.