



## Straight Adapters

**Figure 1**  
(Straight jack-jack;  
connects two plugs)





**Figure 2**  
(Straight plug-plug;  
connects two jacks)




| Figure | Dimensions |     | Plating |          | Delta P/N     |
|--------|------------|-----|---------|----------|---------------|
|        | A          | B   | Body    | Contact  |               |
| 1      | 1.75       | .66 | Nickel  | Gold (C) | 1828-000-N000 |
| 2      | 1.59       | .78 | Nickel  | Gold (C) | 1827-000-N000 |

## Right Angle and Tee Adapters

**Figure 1**  
(Right angle jack-plug;  
connects one plug and one jack)

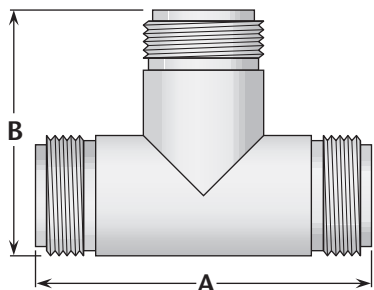

**Figure 2**  
(Tee jack-jack-jack;  
connects three plugs)

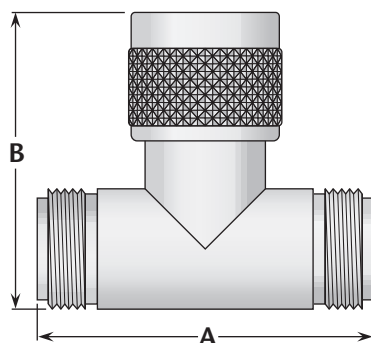

**Figure 3**  
(Tee jack-plug-jack;  
connects two plugs and one jack)

| Figure | Dimensions |      | Plating |          | Delta P/N     |
|--------|------------|------|---------|----------|---------------|
|        | A          | B    | Body    | Contact  |               |
| 1      | 1.30       | 1.38 | Nickel  | Gold (C) | 1829-000-N000 |
| 2      | 1.75       | 1.22 | Nickel  | Gold (C) | 1838-000-N000 |
| 3      | 1.75       | 1.47 | Nickel  | Gold (C) | 1830-000-N000 |

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.