


Bulkhead Jack-Jack Adapter

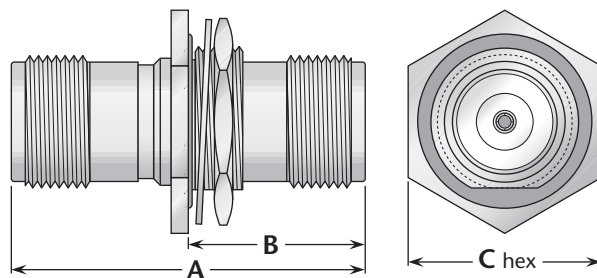

(Connects two plugs, hermetically sealed)

Dimensions			Max. Panel	Mounting Figure	Plating		Delta P/N
A	B	C			Body	Contact	
1.84	1.00	1.00	.125	51	Nickel	Gold (C)	1926-000-N518

Straight and Right Angle Adapters

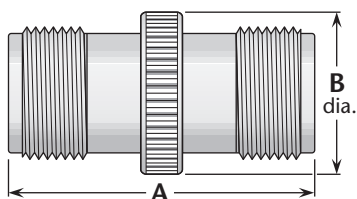


Figure 1
(Straight jack-jack;
connects two plugs)




Figure 2
(Straight plug-plug;
connects two jacks)

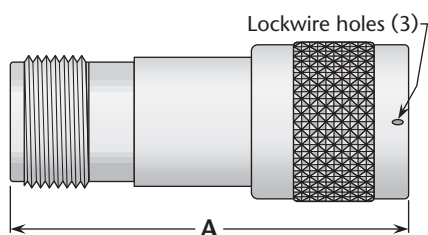


Figure 3
(Straight jack-plug;
connects one plug and one jack)




Figure 4
(Right angle jack-plug;
connects one plug and one jack)

Figure	Dimensions		Plating		Delta P/N
	A	B	Body	Contact	
1	1.64	.75	Nickel	Silver (C)	1928-000-N000
2	1.75	—	Nickel	Silver (C)	1927-000-N000
3	2.05	—	Nickel	Gold (C)	1934-000-N000-1
4	1.46	1.48	Nickel	Gold (C)	1935-000-N000-1

(C) in contact plating column indicates captive contact. • See page 203 for mounting dimensions.
See page 6 for alternate body plating information.