

Resistive Terminations

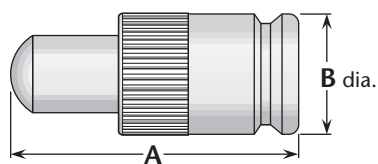


Figure 1
(Jack type)

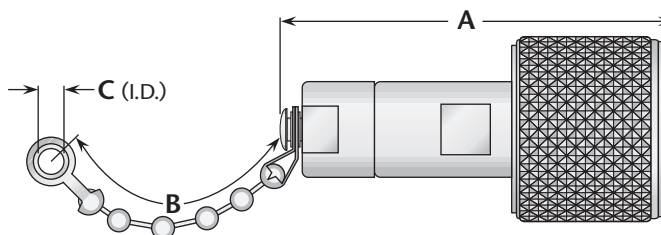


Figure 2
(Plug type)

Fig.	Resistor	Dimensions			Features	Plating		Delta P/N
		A	B	C		Body	Contact	
1	50Ω ±1%, .5 Watt	1.50	.63	—	No chain	Silver	Gold (C)	3831-000-A00A
2	50Ω ±1%, 1 Watt	1.75	2.50	.144	Bead chain	Silver	Gold (C)	3851-000-A000

Adapters Between Series

Figure 1
(QDS jack to N jack,
bulkhead mounted)

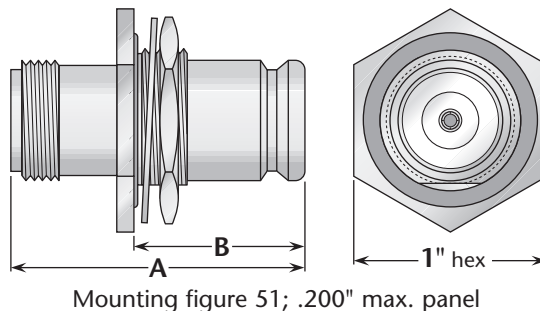


Figure 2
(QDS jack to N plug)

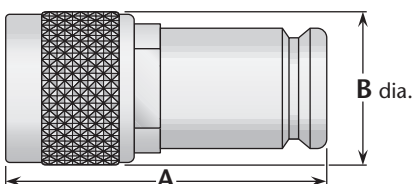


Figure 3
(QDS plug to N jack)

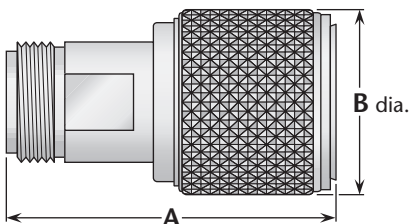


Figure	Dimensions		Plating		Delta P/N
	A	B	Body	Contact	
1	1.52	.865	Albaloy	Gold (C)	2226-000-Q511-1
2	1.38	.78	Albaloy	Gold (C)	2234-000-Q001-131
3	1.67	1.00	Silver	Silver (C)	UG-1144/U

See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact.
See page 6 for alternate body plating information.