

Cable Jacks

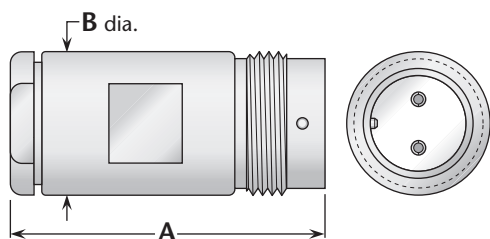


Figure 1
(Straight jack)

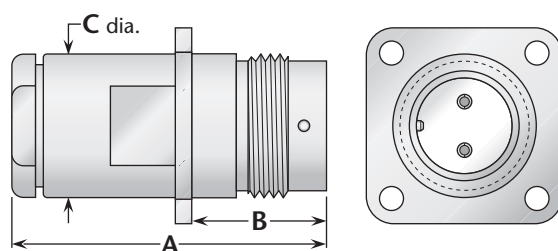


Figure 2
(Panel jack)

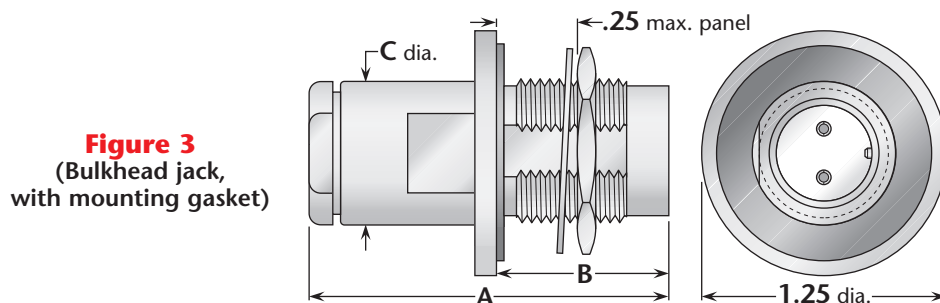


Figure 3
(Bulkhead jack,
with mounting gasket)

Cable Group	Fig.	Dimensions			Mounting Figure	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C		Body	Contact		
28	1	1.59	.75	—	—	Nickel	Silver	2608-070-N000	***
28	2	1.75	.69	.75	33	Nickel	Silver	UG-423B/U	***
28	3	1.75	.88	.75	51	Nickel	Silver	2616-070-N511	***
29	2	1.75	.69	.75	33	Nickel	Silver	2611-201-N331	***
29	3	1.75	.88	.75	51	Nickel	Silver	2616-201-N511	***

Bulkhead Receptacles—Solder Pot Contact

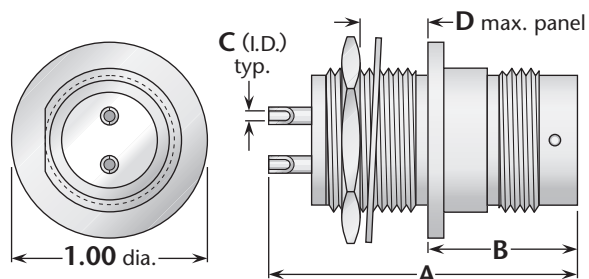


Figure 1
(Bulkhead jack receptacle, front mount)

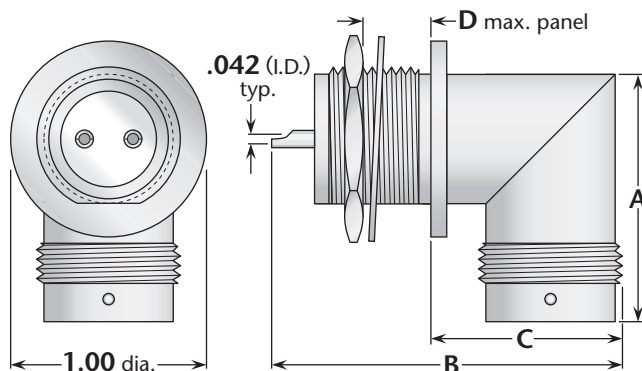


Figure 2
(Right angle bulkhead jack receptacle)

Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	1.58	.785	.042	.25	51	Nickel	Silver (C)	2620-000-N511
2	1.53	1.75	.970	.25	51	Nickel	Silver (C)	2622-000-N511

See page 204 for cable groups. • ***Contact factory for cable assembly instructions. • See page 203 for mounting dimensions.
See page 6 for alternate body plating information.