

Jack Receptacles

Figure 1
(Bulkhead jack receptacle,
front mount,
solder pot contacts)

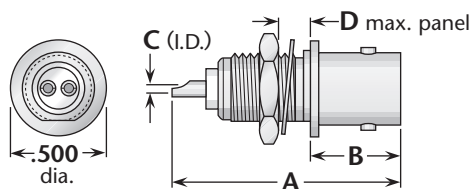


Figure 2
(Straight PCB receptacle)

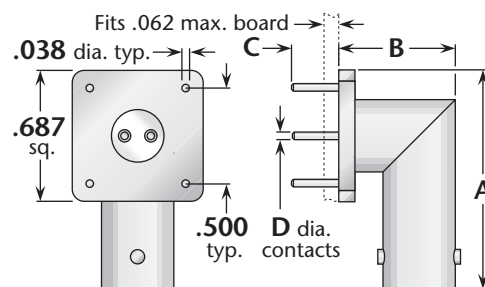
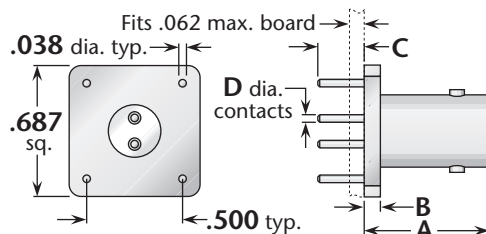


Figure 3
(Right angle PCB receptacle)

Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	1.05	.47	.042	.106	65	Nickel	Gold (C)	6120-000-N651
2	.65	.085	.125	.038	PCB04	Nickel	Silver (C)	6158-000-N13P
3	1.34	.52	.125	.038	PCB04	Nickel	Gold (C)	6169-000-N13P

Adapters

Figure 1
(Straight jack-jack bulkhead adapter; connects two plugs)

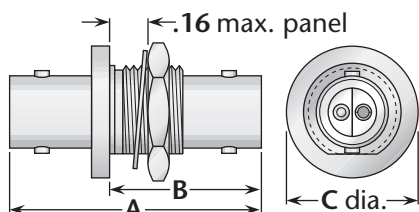


Figure 2
(Straight jack-jack adapter; connects two plugs)




Figure 3
(Tee jack-jack-jack; connects three plugs)




Figure 4
(Tee jack-jack-plug; connects two plugs and one jack)




Figure	Dimensions			Mounting Figure	Plating		Delta P/N
	A	B	C		Body	Contact	
1	1.28	.80	.625	59	Nickel	Gold (C)	6126-000-N591
2	1.28	.44	—	—	Nickel	Gold (C)	6128-000-N000
3	1.28	.89	—	—	Nickel	Gold (C)	6150-000-N000
4	1.28	1.03	—	—	Nickel	Gold (C)	6130-000-N000

See page 204 for cable groups. • See page 6 for alternate body plating information. • ***Contact factory for cable assembly instructions.
See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact.