

Bulkhead Jack Receptacle

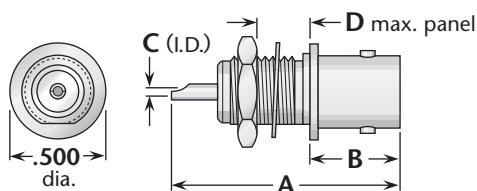


Figure 1
(D-hole mounting)


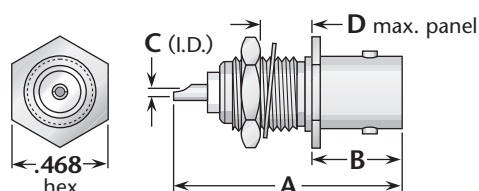


Figure 2
(Round hole mounting)

Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	1.06	.57	.030	.13	65	Nickel	Gold (C)	7520-000-N651-1
2	1.06	.47	.030	.13	89	Nickel	Gold (C)	7521-000-N621-2

Bulkhead Jack-Jack Adapter (Connects two plugs)

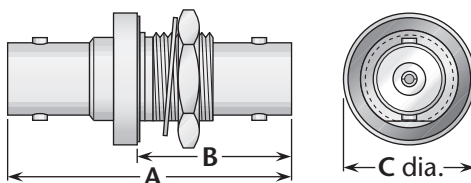

Dimensions			Max. Panel	Mounting Figure	Plating		Delta P/N
A	B	C			Body	Contact	
1.28	.76	.625	.16	59	Nickel	Silver (C)	7526-000-N591*
1.28	.80	.625	.16	59	Nickel	Silver (C)	7526-000-N591-1

Straight and Right Angle Adapters




Figure 1
(Right angle plug-jack;
connects one plug and one jack)




Figure 2
(Straight plug-plug;
connects two jacks)




Figure 3
(Straight jack-jack;
connects two plugs)

Figure	Dimensions		Plating		Delta P/N
	A	B	Body	Contact	
1	1.06	.88	Nickel	Gold (C)	7529-000-N000
2	1.22	—	Nickel	Gold (C)	7527-000-N001
3	1.28	.44	Nickel	Gold (C)	7528-000-N001

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.
See page 203 for mounting dimensions. • *Isolated ground mounting.