

Straight Plug—For Flexible and Semi-Rigid Cable




Figure 1
(Clamp type for flexible cable)




Figure 2
(Crimp type for flexible cable)

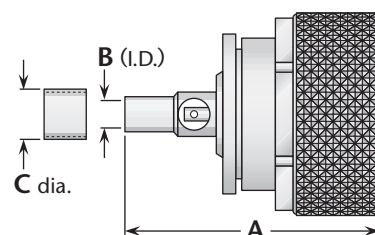


Figure 3
(Solder type for semi-rigid cable)

Cable Group	Figure	Dimensions			Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C	Body	Contact		
2, 3	1	1.85	.75	—	Silver	Gold (C)	9201-004-A001	A/01
4	1	1.85	.75	—	Silver	Gold (C)	9201-079-A001	A/01
3, 4	2	1.89	.63	—	Silver	Silver (C)	9203-005-A001	***
12	3	1.72	.254	.387	Silver	Silver (C)	9201-050-A003-2	***
13	3	1.59	.148	.319	Silver	Silver (C)	9201-031-A003	***

Right Angle Plug—For Flexible and Semi-Rigid Cable

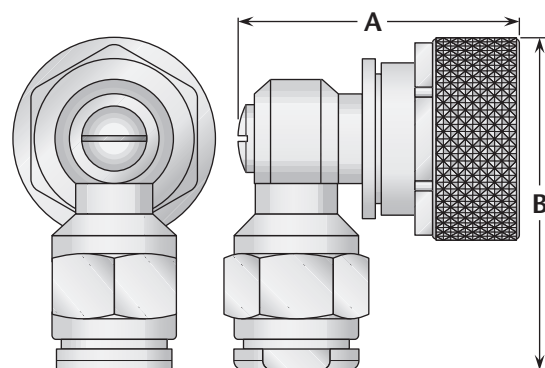


Figure 1
(Clamp type for flexible cable
or solder-clamp for semi-rigid cable)

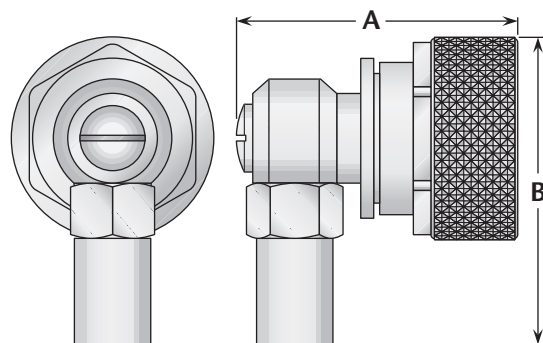


Figure 2
(Crimp type for flexible cable)

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2, 3	1	1.68	2.04	Silver	Silver (C)	9205-005-A001-2	A/35
4	1	1.68	2.04	Silver	Silver (C)	9205-079-A001-1	A/35
5, 6	1	1.68	1.53	Silver	Silver (C)	9205-015-A001	A/36
12	1	1.68	2.04	Silver	Silver (C)	9205-050-A003-1	***
13	1	1.68	1.53	Silver	Silver (C)	9205-031-A003	***
3, 4	2	1.68	1.86	Silver	Silver (C)	9207-005-A001	B/31
5	2	1.68	1.73	Silver	Silver (C)	9207-017-A001	B/31
6	2	1.68	1.73	Silver	Silver (C)	9207-015-A001	B/31

See page 204 for cable groups. • Cable assembly instructions start on page 205. • ***Contact factory for cable assembly instructions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.