

Bulkhead Mounted Jacks—For Flexible and Semi-Rigid Cable

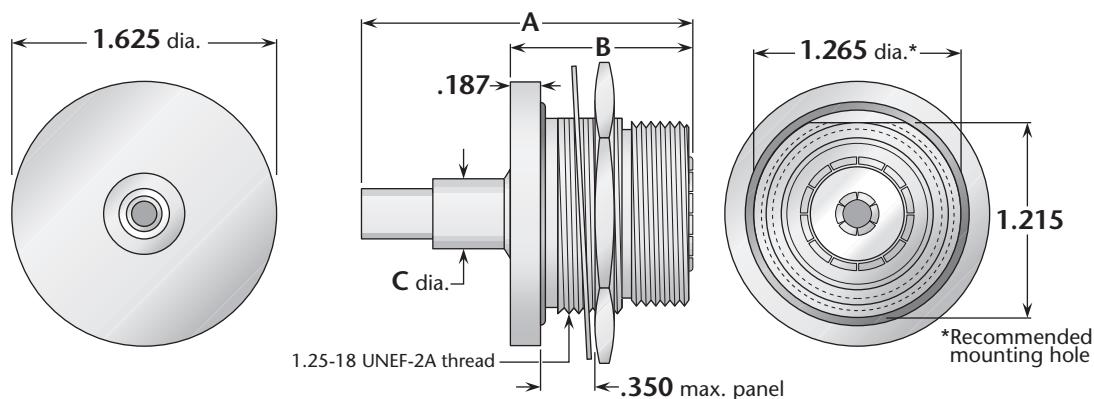


Figure 1
(Crimp type for flexible cable)

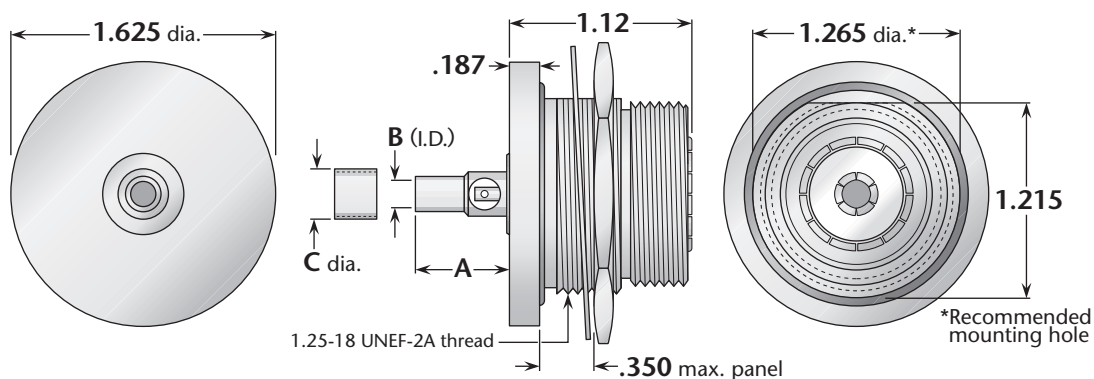


Figure 2
(Solder type for semi-rigid cable)

Cable Group	Figure	Dimensions			Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C	Body	Contact		
3, 4	1	2.34	1.17	.625	Silver	Silver (C)	9219-005-A911	B/19
12	2	.47	.254	.387	Silver	Silver (C)	9216-050-A911	***
13	2	.60	.148	.319	Silver	Silver (C)	9216-031-A911	***

See page 204 for cable groups. • Cable assembly instructions start on page 205. • ***Contact factory for cable assembly instructions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.