

Panel Plug Receptacle—Tab Contact

Figure 1
(1" square flange, interchangeable with type N standard flange size)

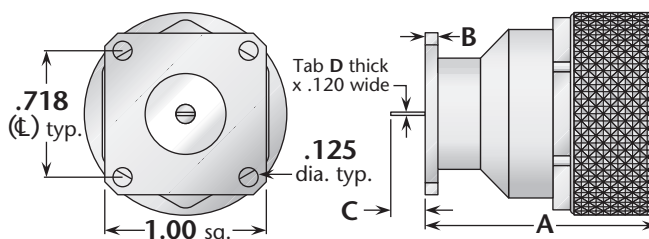


Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	1.40	.080	.100	.005/.008	33	Silver	Gold (C)	9259-000-A331

Panel Plug Receptacle—Slotted Contact

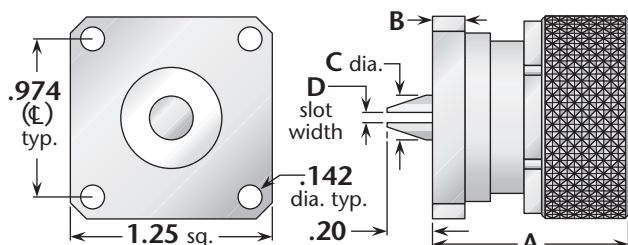


Figure 1
(Standard flange)

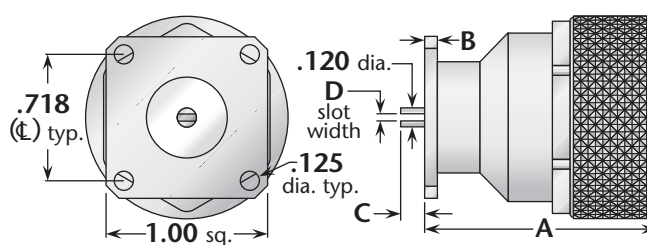


Figure 2
(1" square flange, interchangeable with type N standard flange size)

Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	1.21	.197	.276	.095	See above	Silver	Silver (C)	9223-000-A911-2
2	1.40	.080	.050	.013/.017	33	Silver	Gold (C)	9259-000-A331-6

Panel Plug Receptacle—Post Contact

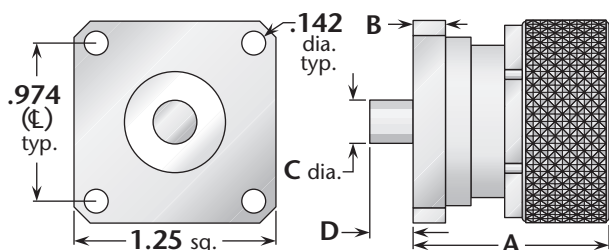


Figure 1
(Standard flange)

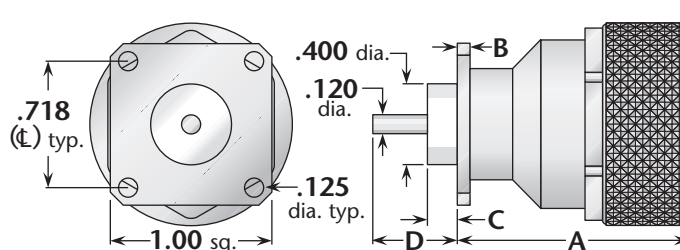


Figure 2
(1" square flange, interchangeable with type N standard flange size)

Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	1.21	.197	.274	.250	See above	Silver	Silver (C)	9259-000-A911-4
2	1.40	.080	.325	.500	33	Silver	Silver (C)	9259-000-A331-7
2	1.40	.080	.000	.562	33	Silver	Gold (C)	9259-000-A331-1

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.

All items are available with other flange sizes and contact configurations.

7/16 connectors with 1" square flanges have lower maximum power rating than standard-flange connectors—contact factory for details.