




## Straight and Right Angle Cable Plugs

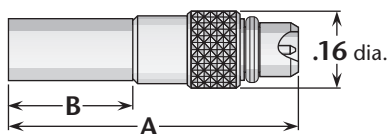


**Figure 1**  
(Straight crimp type for flexible cable)



**Figure 2**  
(Straight direct solder for semi-rigid cable)

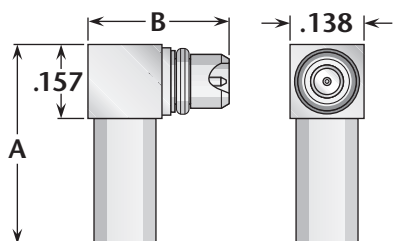


**Figure 3**  
(Right angle crimp type for flexible cable)

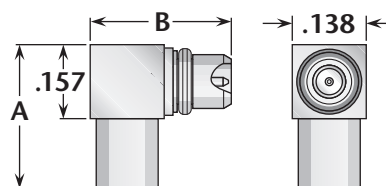


**Figure 4**  
(Right angle direct solder for semi-rigid cable)

| Cable Group | Figure | Dimensions |     | Plating |          | Delta P/N         | Assembly Procedure/<br>Trim Code |
|-------------|--------|------------|-----|---------|----------|-------------------|----------------------------------|
|             |        | A          | B   | Body    | Contact  |                   |                                  |
| 9           | 1      | .61        | .27 | Gold*   | Gold     | 9503-037-G000-500 | B/37                             |
| 9           | 3      | .43        | .27 | Gold*   | Gold (C) | 9507-037-G001-500 | L/04                             |
| 11          | 1      | .61        | .27 | Gold*   | Gold     | 9503-038-G000-500 | B/37                             |
| 11          | 3      | .43        | .27 | Gold*   | Gold (C) | 9507-038-G001-500 | L/04                             |
| 14          | 2      | .49        | .16 | Gold*   | Gold     | 9501-025-G003-500 | H/01                             |
| 14          | 4      | .30        | .27 | Gold*   | Gold (C) | 9505-025-G003-500 | J/04                             |


## Straight Cable Jacks

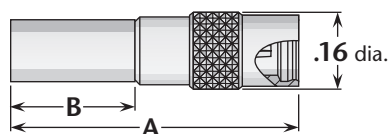

**Figure 1**  
(Crimp type for flexible cable)

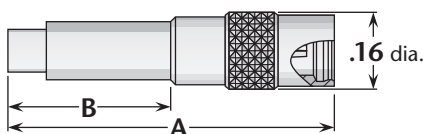

**Figure 2**  
(Crimp type for flexible cable)

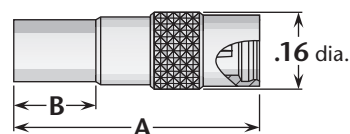

**Figure 3**  
(Direct solder for semi-rigid cable)

| Cable Group | Figure | Dimensions |     | Plating |         | Delta P/N         | Assembly Procedure/<br>Trim Code |
|-------------|--------|------------|-----|---------|---------|-------------------|----------------------------------|
|             |        | A          | B   | Body    | Contact |                   |                                  |
| 9           | 1      | .63        | .27 | Gold*   | Gold    | 9510-037-G000-500 | B/37                             |
| 11          | 2      | .70        | .37 | Gold*   | Gold    | 9510-038-G000-500 | B/39                             |
| 14          | 3      | .51        | .16 | Gold*   | Gold    | 9510-025-G003-500 | H/01                             |

\* Also available with nickel-plated body—change G in Delta part number to N. • See page 204 for cable groups.  
(C) in contact plating column indicates captive contact. • Assembly procedures start on page 205.