# **Product data sheet**

# Subminiature connectors




Product description Snap-In Male cable connector, Contacts: 4, 3.0-4.0 mm, unshielded, solder, IP40

Area Snap-In IP40 series 719
Part no. 09 9767 70 04

#### Illustration

## Scale drawing

## Contact arrangement (Plug-in side)

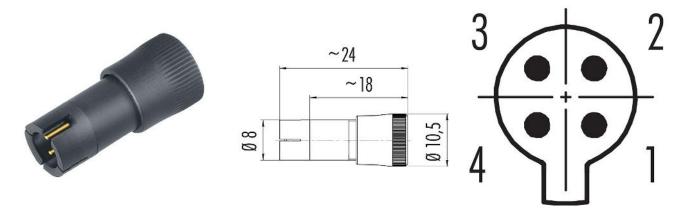

You can find the assembly instructions on the next page.

#### **Technical data**

#### General features

09 9767 70 04
Male cable connector
Connector pin straight
snap-in
solder
IP40
0.25 mm <sup>2</sup> / AWG 24
3.0-4.0 mm
-25 °C / 70 °C
> 100 Mating cycles
1.28
85369010
DE

## **Electrical parameters**

Rated voltage	60 V
Rated impulse voltage	800 V
Rated current	3,0 A
Insulation resistance	≥ 10¹\( \Omega\)
Pollution degree	1
Overvoltage category	II
Insulating material group	III
EMC compliance	unshielded

#### Material

Waterial		
Housing material	PA	

## **Product data sheet**

# Subminiature connectors



Product description Snap-In Male cable connector, Contacts: 4, 3.0-4.0 mm, unshielded, solder, IP40

Area Snap-In IP40 series 719
Part no. 09 9767 70 04

Contact body materialPAContact materialCuZn (brass)Contact platingAu (gold)REACH SVHCCAS 7439-92-1 (Lead)SCIP numberd2d2077d-be82-45ec-b14f-ddd7989e9e6b

#### Classifications


eCl@ss 11.1	27-44-01-09
ETIM 9.0	EC003569

### **Declarations of conformity**

Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)

### **Assembly instructions**

- 1. Bead pressing screw and clamping sleeve to cable.
- 2. Dismantle cable to 9 mm length.
- 3. Strip and solder single wires.
- 4. Screw on clamping sleeve.
- 5. Tighten pressing screw.

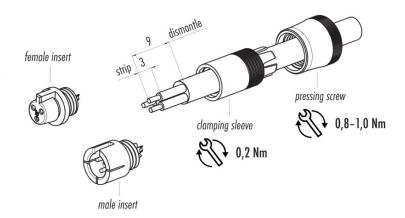

## **Product data sheet**

# Subminiature connectors



Product description Snap-In Male cable connector, Contacts: 4, 3.0-4.0 mm, unshielded, solder, IP40

Area Snap-In IP40 series 719
Part no. 09 9767 70 04

### **General Disclaim Notice**

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.