

UW Power Connectors



Ordering Information

UW 1220 M A XX

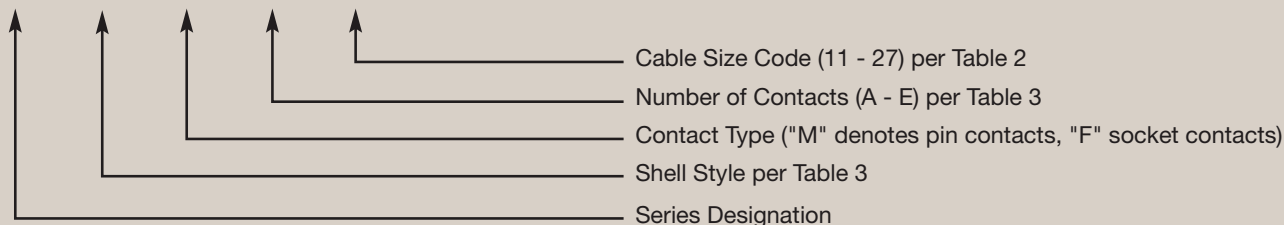


TABLE 1

TABLE 1					
CI PART NUMBER	STYLE	CONTACT TYPE	MOUNTING STYLE	NUMBER OF CONTACTS (CODE LETTER)	CONTACT SIZE
UW1220FAXX	Round Plug	Socket	Cable	4 (A)	12
UW1220FBXX		Pin		9 (B)	
UW1220MAXX				4 (A)	
UW1220MBXX				9 (B)	
UW1320FAXX	Socket	4 (A)			
UW1320FBXX	Pin	9 (B)			
UW1320MAXX		4 (A)			
UW1320MBXX		9 (B)			
UW1326FCXX	Large Cathedral Plug	Socket		14 (C)	16
UW1326FDXX				19 (D)	
UW1326FEXX				30 (E)	20
UW1326MCXX		Pin		14 (C)	16
UW1326MDXX				19 (D)	
UW1326MEXX				30 (E)	20
UW2020FA00	Small Receptacle	Socket	Panel	4 (A)	12
UW2020FB00		Pin		9 (B)	
UW2020MA00				4 (A)	
UW2020MB00				9 (B)	
UW2026FC00	Large Receptacle	Socket		14 (C)	16
UW2026FD00				19 (D)	
UW2026FE00				30 (E)	20
UW2026MC00		Pin		14 (C)	16
UW2026MD00				19 (D)	
UW2026ME00				30 (E)	20

TABLE 2

"XX" VALUE	CABLE DIAMETER (INCHES)	NUMBER OF CONTACTS
11	0.292 to 0.343	4, 9
13	0.323 to 0.406	4, 9
15	0.386 to 0.486	4, 9
17	0.448 to 0.531	4, 9
19	0.511 to 0.593	4, 9, 14, 19, 30
21	0.573 to 0.656	4, 9, 14, 19, 30
23	0.636 to 0.718	14, 19, 30
25	0.698 to 0.781	14, 19, 30
27	0.761 to 0.843	14, 19, 30

UW Connectors

TABLE 3

CONTACTS DESIGNATION	SHELL STYLE DESIGNATION	
A = 4	1220	Round Plug
B = 9	1320	Small Cathedral Plug
C = 14	1326	Large Cathedral Plug
D = 19	2020	Small Receptacle
E = 30	2026	Large Receptacle