

Panel Jack Receptacle—Square Flange

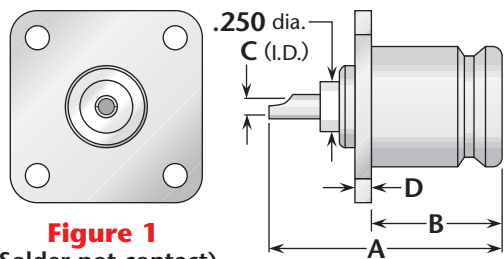


Figure 1
(Solder pot contact)

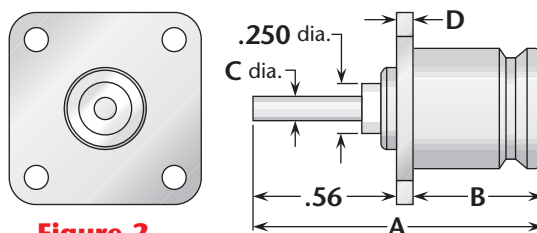


Figure 2
(Post contact)

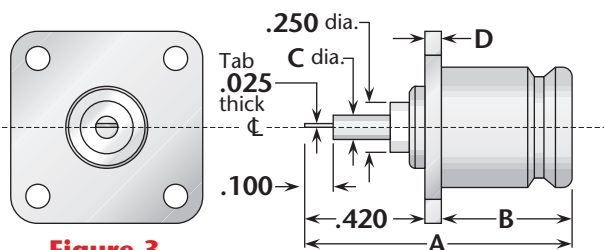


Figure 3
(Tab contact)

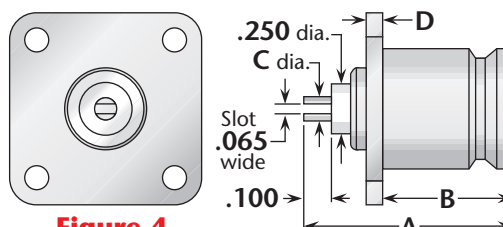



Figure 4
(Slotted contact)

Also available with other contact/insulator configurations and flange sizes

Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	1.08	.67	.106	.080	33	Albaloy	Gold (C)	3813-000-Q331
2	1.31	.67	.120	.080	33	Albaloy	Gold (C)	3858-000-Q331-1
3	1.17	.67	.120	.080	33	Albaloy	Gold (C)	3858-000-Q331-3
4	1.00	.67	.120	.080	33	Albaloy	Gold (C)	3858-000-Q331-2

Bulkhead Jack Receptacle

Figure 1
(Rear mount, with mounting gasket)

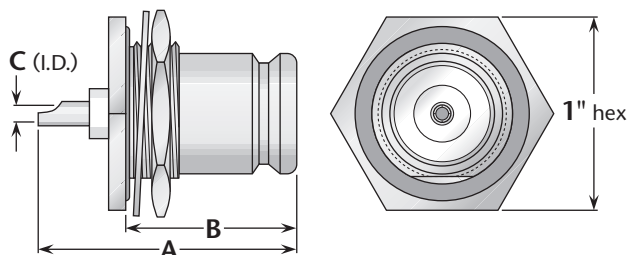

Also available with post, slotted, or tab contact

Figure	Dimensions			Max. Panel	Mounting Figure	Plating		Delta P/N
	A	B	C			Body	Contact	
1	1.08	.75	.106	.125	51	Silver	Silver (C)	UG-1111/U
1	1.08	.75	.106	.125	51	Albaloy	Gold (C)	3816-000-Q511-2

See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact.
See page 6 for alternate body plating information.