



## Bulkhead Jack-Jack Adapter (Connects two plugs)

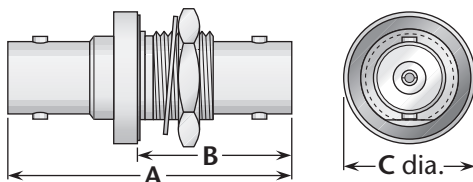

| Dimensions |     |      | Max. Panel | Mounting Figure | Plating |            | Delta P/N        |
|------------|-----|------|------------|-----------------|---------|------------|------------------|
| A          | B   | C    |            |                 | Body    | Contact    |                  |
| 1.53       | .86 | .69  | .275       | 59              | Nickel  | Silver (C) | UG-492A/U*       |
| 1.53       | .86 | .69  | .275       | 59              | Nickel  | Silver (C) | UG-492C/U*       |
| 1.53       | .86 | .69  | .275       | 59              | Nickel  | Silver (C) | UG-492D/U*       |
| 1.53       | .86 | .69  | .275       | 59              | Silver  | Gold (C)   | M55339/13-00492* |
| 1.28       | .80 | .625 | .160       | 59              | Nickel  | Silver (C) | 1026-000-N591    |


\* Hermetically sealed, with mounting gasket.

## Panel Mounted Jack-Jack Adapter (Connects two plugs)

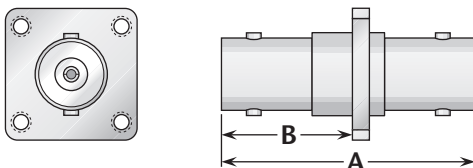

| Dimensions |     | Mounting Figure | Plating |            | Delta P/N |
|------------|-----|-----------------|---------|------------|-----------|
| A          | B   |                 | Body    | Contact    |           |
| 1.28       | .69 | 07              | Nickel  | Silver (C) | UG-414A/U |

## Straight Jack-Jack Adapter (Connects two plugs)



| Dimensions |     | Plating |            | Delta P/N       |
|------------|-----|---------|------------|-----------------|
| A          | B   | Body    | Contact    |                 |
| 1.28       | .44 | Nickel  | Silver (C) | UG-914/U        |
| 1.28       | .44 | Silver  | Gold (C)   | M55339/16-00914 |
| 1.28       | .44 | Nickel  | Gold (C)   | 1028-000-N001-3 |

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.  
See page 203 for mounting dimensions.