

Panel Jack—Military Clamp for Flexible Cable

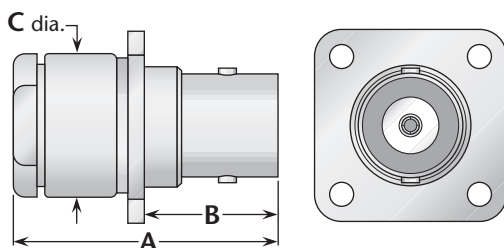


Figure 1

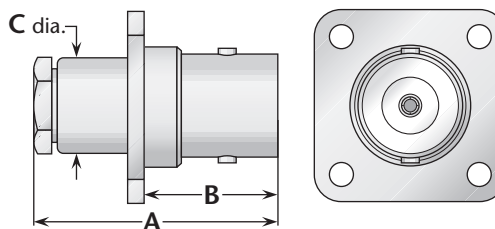


Figure 2

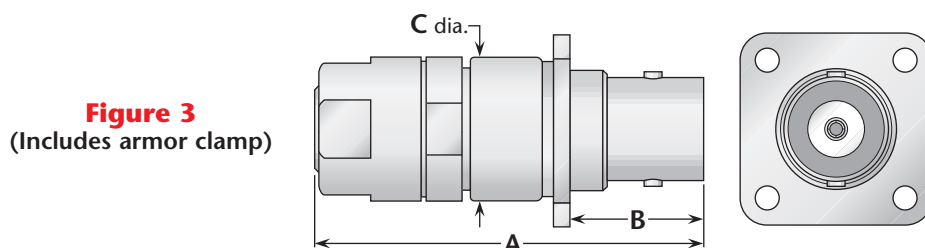


Figure 3
(Includes armor clamp)

Cable Group	Fig.	Dimensions			Mounting Figure	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C		Body	Contact		
1	1	1.41	.69	.75	26	Nickel	Silver	UG-629A/U	A/20
2, 3	1	1.41	.69	.75	26	Nickel	Silver	UG-571A/U	A/20
2, 3	1	1.41	.69	.75	26	Nickel	Silver (C)	1411-004-N261	A/01
5, 6	2	1.28	.67	.50	26	Nickel	Silver	1411-015-N260	A/25
15	3	2.00	.69	.75	26	Nickel	Silver	UG-938A/U	D/04

Panel Jack Receptacle—Square Flange

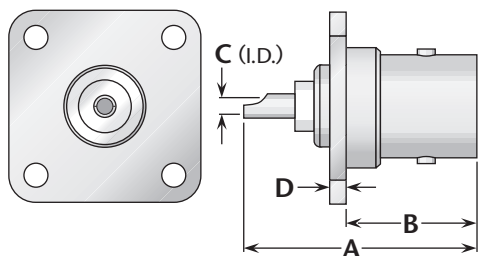


Figure 1
(Solder pot contact)

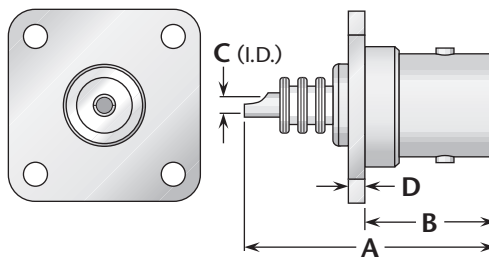


Figure 2
(Solder pot contact)




Figure 3
(Dummy receptacle)

Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	1.06	.67	.106	.080	26	Nickel	Silver (C)	UG-568/U
1	1.06	.67	.106	.080	33	Nickel	Silver (C)	1413-000-N331
2	1.31	.67	.106	.080	33	Nickel	Gold (C)	1413-000-N331-1*
3	.740	.080	—	—	33	Nickel	—	1463-000-N330

* High-voltage type.

See page 204 for cable groups. • Assembly procedures start on page 205. • See page 203 for mounting dimensions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.