

Tee Plug—For Flexible and Semi-Rigid Cable

Figure 1
(Crimp type for flexible cable)


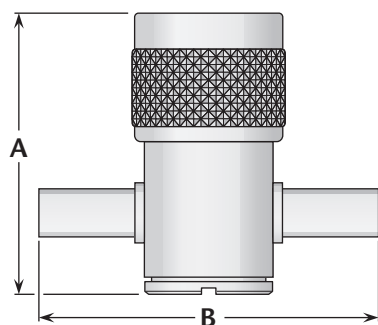


Figure 2
(Direct solder for semi-rigid cable)



Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2	1	1.39	2.00	Silver	Silver (C)	1185-002-A000	B/16
3	1	1.39	2.00	Silver	Silver (C)	1185-004-A000-2	B/16
6	1	1.39	1.82	Silver	Silver (C)	1185-013-A001	B/17
7	1	1.39	1.82	Silver	Silver (C)	1185-019-A000	B/17
9	1	1.39	1.82	Silver	Silver (C)	1185-036-A000	B/17
13	2	1.39	.90	Silver	Silver (C)	1185-031-A000	***

Straight Jack—Military Clamp for Flexible Cable




Figure 1




Figure 2

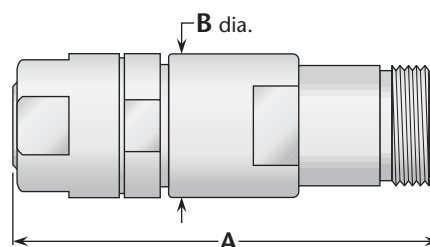


Figure 3
(Includes armor clamp)

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
1	1	1.56	.75	Nickel	Silver	UG-20E/U	A/01
1	1	1.67	.75	Silver	Gold (C)	M39012/02-0101	A/01
2, 3	1	1.56	.75	Nickel	Silver	UG-23D/U	A/01
2, 3	1	1.56	.75	Nickel	Gold	UG-23F/U	A/01
2, 3	1	1.56	.75	Nickel	Silver (C)	UG-1186/U	A/01
2, 3	1	1.56	.75	Nickel	Silver (C)	UG-1186A/U	A/01
2, 3	1	1.67	.75	Silver	Gold (C)	M39012/02-0003	A/01
5, 6	2	1.41	.50	Nickel	Silver	1108-015-N000	A/05
5, 6	2	1.47	.50	Nickel	Silver (C)	1108-015-N001	A/02
7	2	1.41	.50	Nickel	Silver	UG-602A/U	A/02
7	2	1.27	.50	Nickel	Silver	1108-000-N000-3*	—
7	2	1.47	.50	Nickel	Silver (C)	1108-021-N001	A/02
15	3	2.25	.75	Nickel	Silver	UG-940B/U	D/03
19	1	1.56	.75	Nickel	Gold (C)	1108-027-N001	A/12
22	1	1.87	.69	Nickel	Gold	1108-123-N000	C/03

*UG-602A/U less clamping hardware.

See page 204 for cable groups. • Assembly procedures start on page 205. • ***Contact factory for cable assembly instructions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.