

Bulkhead Jacks—Military Clamp for Flexible Cable

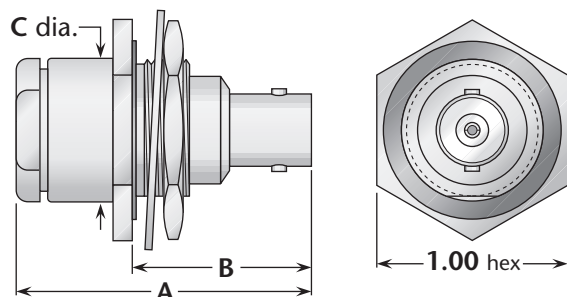


Figure 1
(Rear mount)

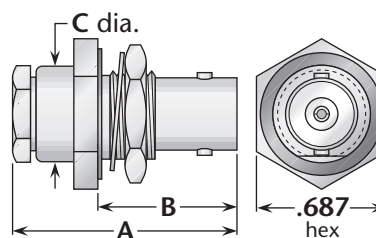


Figure 2
(Rear mount)

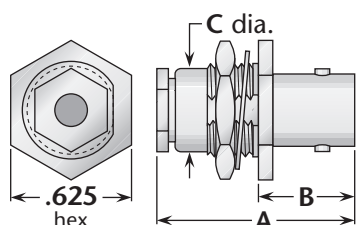


Figure 3
(Front mount)




Figure 4
(Front mount)

Cable Group	Fig.	Dimensions			Mounting Figure	Max. Panel	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C			Body	Contact		
2, 3	1	1.55	.92	.75	51	.11	Nickel	Gold (C)	1016-004-N511	A/20
5, 6	2	1.16	.68	.50	59	.11	Nickel	Silver	UG-909/U	A/17
5, 6	2	1.16	.68	.50	59	.11	Nickel	Silver	UG-909A/U	A/17
5, 6	2	1.16	.81	.50	59	.24	Nickel	Silver	UG-909B/U	A/17
5, 6	2	1.16	.81	.50	59	.24	Silver	Gold (C)	M39012/19-0101	A/17
5, 6	2	1.16	.68	.50	59	.11	Nickel	Gold (C)	1016-015-N591	A/17
5, 6	3	1.14	.55	.44	57	.09	Nickel	Silver	1017-014-N570	C/04
7	2	1.16	.68	.50	59	.11	Nickel	Silver	UG-910/U	A/17
7	2	1.16	.68	.50	59	.11	Nickel	Silver	UG-910A/U	A/17
7	2	1.16	.81	.50	59	.24	Nickel	Silver	UG-910B/U	A/17
7	2	1.16	.81	.50	59	.24	Silver	Gold (C)	M39012/19-0102	A/17
7	2	1.16	.68	.50	59	.11	Nickel	Silver (C)	1016-021-N591	A/17
7	4	1.14	.55	.44	57	.09	Nickel	Silver	UG-624/U	C/04
8A	2	1.16	.81	.50	59	.24	Silver	Gold (C)	M39012/19-0110	A/17
9	2	1.16	.68	.50	59	.11	Nickel	Silver	1016-036-N590	A/18
9	2	1.16	.68	.50	59	.11	Nickel	Silver (C)	1016-036-N591	A/17
9	2	1.16	.81	.50	59	.24	Silver	Gold (C)	M39012/19-0220	A/17
11	2	1.16	.68	.50	59	.11	Nickel	Silver	1016-038-N590	A/18
11	2	1.16	.68	.50	59	.11	Nickel	Silver (C)	1016-038-N591	A/18
22	2	1.16	.81	.50	59	.24	Silver	Gold (C)	M39012/19-0118	A/17
23	2	1.16	.81	.50	59	.24	Silver	Gold (C)	M39012/19-0111	A/17

See page 204 for cable groups. • Assembly procedures start on page 205. • See page 203 for mounting dimensions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.