
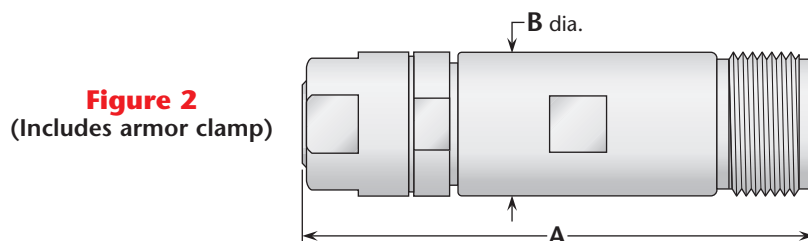


Straight Jack—Military Clamp for Flexible Cable

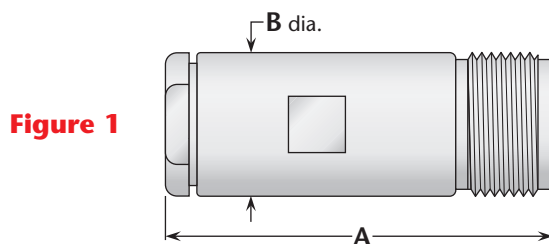

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2, 3	1	2.53	.69	Nickel	Silver	UG-60B/U	***
2, 3	1	2.03	.75	Nickel	Silver	UG-60E/U	A/26
2, 3	1	2.94	.69	Nickel	Silver (C)	UG-1214/U	***
15	2	2.63	.75	Nickel	Silver	UG-927B/U	D/05
17	1	2.53	1.31	Nickel	Silver	UG-333C/U	A/28

Panel Jack—Military Clamp for Flexible Cable

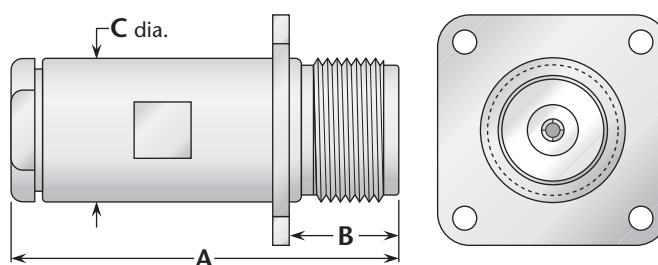


Figure 1

Cable Group	Fig.	Dimensions			Mounting Figure	Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C		Body	Contact		
2, 3	1	2.53	.59	.69	40	Nickel	Silver	UG-61B/U	***
2, 3	1	2.03	.59	.75	40	Nickel	Silver	UG-61E/U	A/26
2, 3	1	2.03	.59	.75	36	Nickel	Silver	UG-427C/U	A/26

See page 204 for cable groups. • Assembly procedures start on page 205.
 ***Contact factory for cable assembly instructions. • See page 203 for mounting dimensions.
 (C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.