

Straight Plug—Military Clamp for Flexible Cable

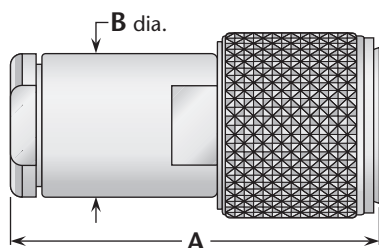


Figure 1

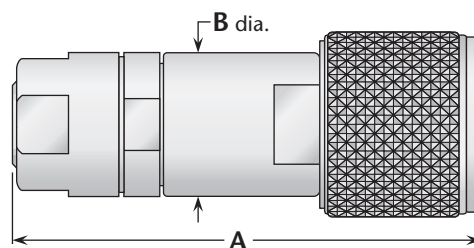


Figure 2
(Includes armor clamp)

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2, 3	1	1.83	.75	Albaloy	Gold	3801-004-Q000-1	A/02
5, 6	1	1.83	.75	Albaloy	Gold	3801-015-Q000-1	A/02
15	2	2.16	.812	Silver	Silver	UG-968B/U	D/04

Right Angle Plug—Military Clamp for Flexible Cable

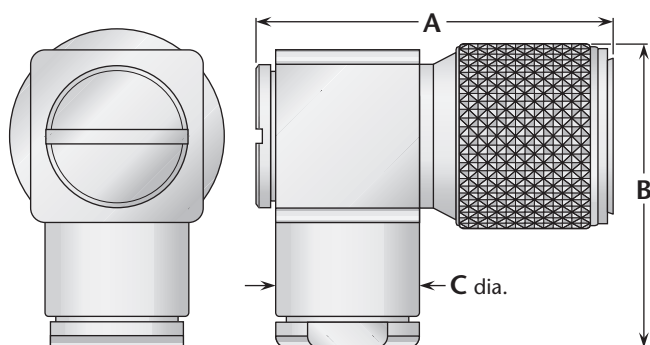


Figure 1

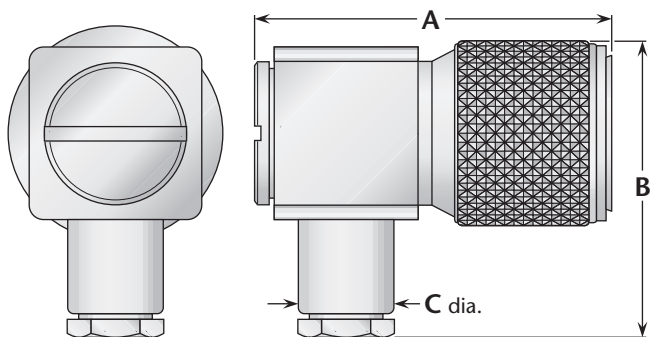


Figure 2

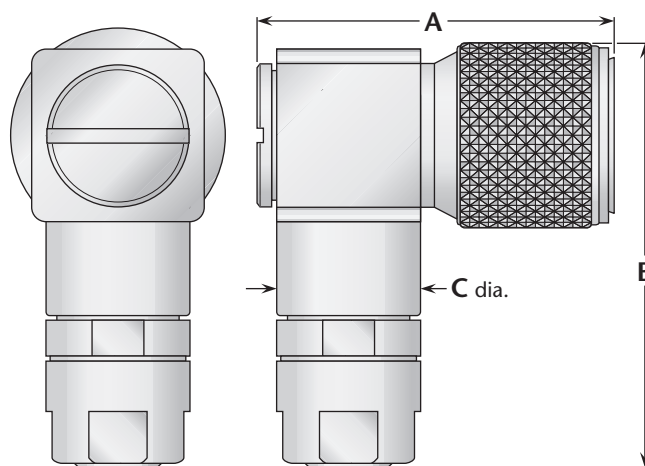


Figure 3
(Includes armor clamp)

Cable Group	Figure	Dimensions			Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C	Body	Contact		
2, 3	1	1.93	1.85	.75	Albaloy	Gold (C)	3805-004-Q000	A/31
5, 6	2	1.93	1.63	.50	Albaloy	Gold (C)	3805-015-Q000	A/30
15	3	1.93	2.40	.812	Albaloy	Gold (C)	3805-006-Q000	***

See page 204 for cable groups. • Assembly procedures start on page 205. • ***Contact factory for cable assembly instructions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.