


Product Area	Male socket, solder M16 connectors IP 67	serie 423/ 723/ 425	Pole Article number	3 DIN 09 0107 09 03
--------------	---	---------------------	---------------------	------------------------


illustration



scale drawing

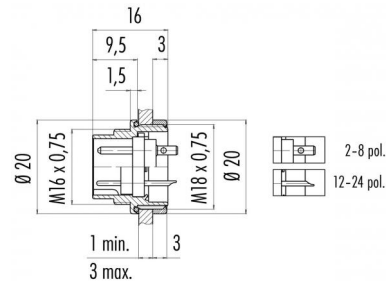

Contact Arrangement

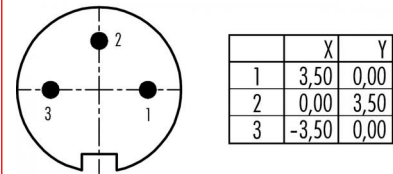

You can find the assembly instruction on the next page.

Technical data

Common values

Connector Design	Male socket
Connector locking system	Screw
Termination	solder
Wire gauge (mm)	0,75 mm ²
Wire gauge (AWG)	20
Upper temperature	+95 °C
Lower temperature	-40 °C

Material

Material of contact	CuZn (brass)
Contact plating	Au (gold)
Material of contact body	PBT (UL 94 V-0)
Material of housing	zinc diecasting, nickel plated

Cable data

Contacts 3 DIN, male socket, solder, gold plated contacts

Electrical values

Rated voltage	250 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	7 A
Volume resistivity	≤ 3 mΩ
EMV compliance	shielded
Degree of protection	IP 67
Mechanical operation	>500 mating cycles



Product
Area

Male socket, solder
M16 connectors IP 67

serie 423/ 723/ 425

Pole
Article number

3 DIN
09 0107 09 03

Installation instructions / Mounting cutout

