


Product	Flanschstecker, crimpen, von vorn verschraubbar	Pole	4
Area	M16 connectors IP 67	Article number	09 0111 780 04
	serie 423/ 723/ 425		


illustration



scale drawing

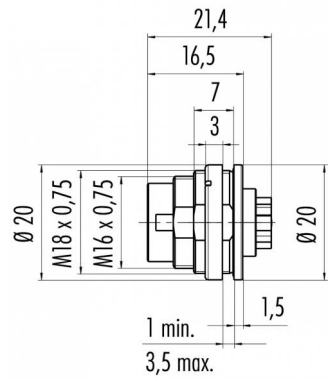

Contact Arrangement



	X	Y
1	3,32	-1,08
2	2,05	2,83
3	-2,05	2,83
4	-3,32	-1,08

Technical data

Common values

Termination	crimp
Wire gauge (AWG)	26-18
Cable outlet	-
Upper temperature	+95 °C
Lower temperature	-40 °C

Material

Material of contact	CuZn (brass)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)
Material of housing	CUZn (brass nickel plated)

Electrical values

Rated voltage	250 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	6 A
Volume resistivity	≤ 5 mΩ
Degree of protection	IP 67
Mechanical operation	>500 mating cycles

Cable data

Polzahl: 4, Flanschstecker, crimpen, von vorn schraubbar

