

Product Area Male socket, dip solder, front fastened  
M16 connectors IP 40


serie 581/ 680/ 682

Pole Article number 5 stereo  
09 0319 99 05

illustration



scale drawing

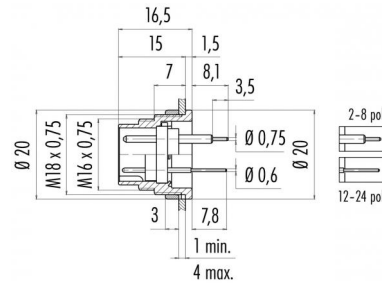

Contact Arrangement



|   | X     | Y    |
|---|-------|------|
| 1 | 3,50  | 0,00 |
| 2 | 0,00  | 3,50 |
| 3 | -3,50 | 0,00 |
| 4 | 2,47  | 2,47 |
| 5 | -2,47 | 2,47 |

You can find the assembly instruction on the next page.

Technical data

Common values

|                          |             |
|--------------------------|-------------|
| Connector Design         | Male socket |
| Connector locking system | Screw       |
| Termination              | dip solder  |
| Wire gauge (mm)          | -           |
| Wire gauge (AWG)         | -           |
| Upper temperature        | +85 °C      |
| Lower temperature        | -40 °C      |

Material


|                          |                                |
|--------------------------|--------------------------------|
| Material of contact      | CuZn (brass)                   |
| Contact plating          | Au (gold)                      |
| Material of contact body | PBT (UL 94 V-0)                |
| Material of housing      | zinc diecasting, nickel plated |

Cable data

Contacts 5 Stereo, male socket, dip solder, front fastened, gold plated contacts

Electrical values

|                       |                    |
|-----------------------|--------------------|
| Rated voltage         | 60 V               |
| Rated impulse voltage | 500 V              |
| Pollution degree      | 1                  |
| Overvoltage category  | I                  |
| Material group        | III                |
| Rated current (40°C)  | 6 A                |
| Volume resistivity    | ≤ 3 mΩ             |
| EMV compliance        | shielded           |
| Degree of protection  | IP 40              |
| Mechanical operation  | >500 mating cycles |



Product Male socket, dip solder, front fastened  
Area M16 connectors IP 40

serie 581/ 680/ 682

Pole  
Article number

5 stereo  
09 0319 99 05

Installation instructions / Mounting cutout

