


Product Area Flanschstecker gewinkelt, Frontmontage, mit Schirmblech, tauchlöt serie 768/718

Pole 5
Article number 093425 82 05


illustration



Conductor layout

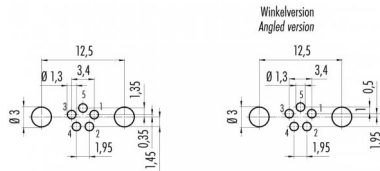


scale drawing



Leiterplattendicke: 1,6 mm
Thickness of PCB: 1,6 mm

Contact Arrangement



	X	Y
1	-1,37	-1,32
2	1,37	-1,32
3	1,75	0,74
4	0	1,90
5	-1,75	0,74

- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black
- 5 grau/grey

Technical data

Common values

Connector Design	Male socket
Termination	dip solder
Upper temperature	+85 °C
Lower temperature	-40 °C

Material

Material of contact body	PA (UL 94 HB)
Material of housing	zinc diecasting, nickel plated, PA

Electrical values

Rated voltage	30 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 67

Cable data

Polzahl: 5, Flanschstecker gewinkelt,
Frontmontage, mit Schirmblech, tauchlöten