


Product Area	Male socket, Degree of protec. Without sealing IP 40, with sealing IP 67 (see accessories) M12 connectors A-Coding serie 713/763	Pole Article number	8 09 3483 00 08
--------------	---	---------------------	--------------------

illustration



scale drawing

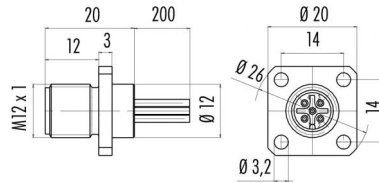

Contact Arrangement

geschirmt/ shielded	nicht geschirmt/ not shielded
1 weiß/white	1 weiß/white
2 braun/brown	2 braun/brown
3 grün/green	3 grün/green
4 gelb/yellow	4 gelb/yellow
5 grau/grey	5 grau/grey
6 rosa/pink	6 rosa/pink
7 blau/blue	7 blau/blue
8 rot/red	8 Schirm/shield
Gehäuse-Schirm/ Housing-shield	

Technical data

Common values

Connector Design	Male socket
Connector locking system	Screw
Termination	wires
Wire gauge (mm)	0,25 mm <sup>2</sup>
Wire gauge (AWG)	24
Upper temperature	+85 °C
Lower temperature	-40 °C

Material

Material of contact	CuZn (brass)
Contact plating	Au (gold)
Material of contact body	PA
Material of housing	CUZn (brass nickel plated)

Cable data

Contacts 8: Male socket, with wires 0,25 mm<sup>2</sup>, Degree of protec. Without sealing IP 40, with sealing IP 67 (see accessories)

Electrical values

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	2 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 40/ IP 67
Mechanical operation	>100 mating cycles

