

Product Male socket, front fastened, shielded, IP 67  
Area Push-Pull connectors IP 67


serie 440

Pole 19  
Article number 09 4843 81 19


illustration



scale drawing

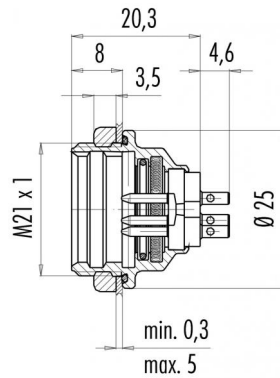

Contact Arrangement

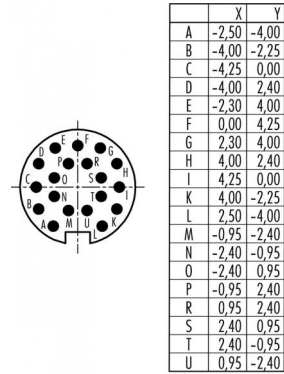

You can find the item description and assembly instruction on the next page.

Technical data

Common values

Connector Design	Male socket
Connector locking system	Push-Pull locking
Termination	solder
Wire gauge (mm)	0,25 mm <sup>2</sup>
Wire gauge (AWG)	24
Cable outlet	-
Upper temperature	+85 °C
Lower temperature	-40 °C

Material

Material of contact	CuZn (brass)
Contact plating	Au (gold)
Material of contact body	PBT (UL 94 V-0)
Material of housing	CUZn (brass nickel plated)

Cable data

Contacts 19, male socket IP 67, front fastened, shielded

Electrical values

Rated voltage	60 V
Rated impulse voltage	500 V
Pollution degree	I
Overvoltage category	I
Material group	III
Rated current (40°C)	3 A
Volume resistivity	≤ 3 mΩ
EMV compliance	shielded
Degree of protection	IP 67
Mechanical operation	>1000 mating cycles




Product Male socket, front fastened, shielded, IP 67  
Area Push-Pull connectors IP 67

serie 440

Pole 19  
Article number 09 4843 81 19

Date: 2014-07-20 - Page 2 of 2

Item description

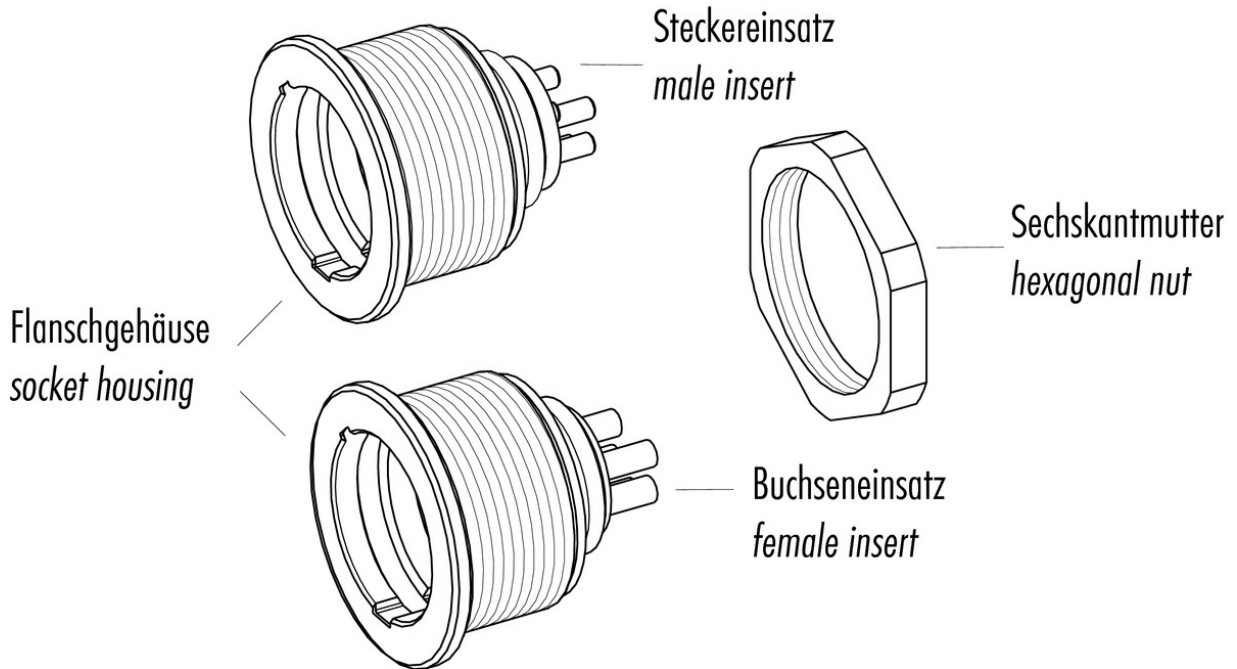

Installation instructions / Mounting cutout

