

Product Male cable connector with strain relief
Area Snap-in connectors IP 40


serie 719

Pole 5
Article number 09 9789 71 05


illustration



scale drawing

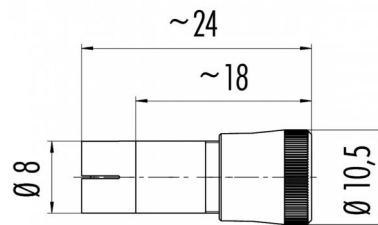

Contact Arrangement



| | X | Y |
|---|-------|-------|
| 1 | 0,88 | -1,21 |
| 2 | 1,42 | 0,46 |
| 3 | 0,00 | 1,49 |
| 4 | -1,42 | 0,46 |
| 5 | -0,88 | -1,21 |

You can find the item description on the next page.

Technical data

Common values

| | |
|--------------------------|----------------------|
| Connector Design | Male cable connector |
| Connector locking system | Snap-in locking |
| Termination | solder |
| Wire gauge (mm) | 0,25 mm ² |
| Wire gauge (AWG) | 24 |
| Cable outlet | max. 5 mm |
| Upper temperature | +70 °C |
| Lower temperature | -25 °C |

Electrical values

| | |
|-----------------------|--------------------|
| Rated voltage | 60 V |
| Rated impulse voltage | 800 V |
| Pollution degree | I |
| Overvoltage category | II |
| Material group | III |
| Rated current (40°C) | 3 A |
| Volume resistivity | ≤ 3 mΩ |
| EMV compliance | not shieldable |
| Degree of protection | IP 40 |
| Mechanical operation | >100 mating cycles |

Material

| | |
|--------------------------|--------------|
| Material of contact | CuZn (brass) |
| Contact plating | Au (gold) |
| Material of contact body | PA |
| Material of housing | PA |

Cable data

| | |
|------------------------|---|
| material housing | - |
| insulation single lead | - |
| single lead structure | - |
| conductor resistance | - |

Contacts 5, Male cable connector with strain relief, max. cable-Ø 5 mm



Product Male cable connector with strain relief
Area Snap-in connectors IP 40


serie 719

Pole 5
Article number 09 9789 71 05



Date: 2014-07-20 - Page 2 of 2

Item description


Buchseinsatz
female insert



Steckereinsatz
male insert

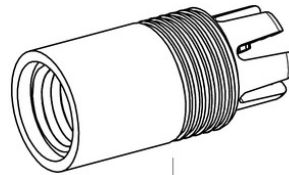

Klemmkorb
pinch ring



Druckschraube
pressing screw