


Product Area	Flange plug connector, PG 9, screwed from front, with Profinet cable, shielded M12 connectors D-Coding serie 825/876	Pole	4
		Article number	70 3734 706 04

illustration



scale drawing

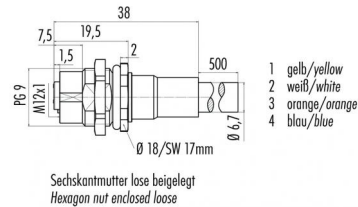

You can find the assembly instruction on the next page.

Technical data

Common values

Connector Design	Female socket
Termination	PUR cable
Wire gauge (mm)	-
Wire gauge (AWG)	22
Upper temperature	+60 °C
Lower temperature	-20 °C

Electrical values


Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40 °C)	4 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 67
Mechanical operation	>100 mating cycles

Material

Material of contact	CuSn (bronze)
Contact plating	Au (gold)
Material of contact body	PA
Material of housing	brass, zinc diecasting, nickel plated

Cable data

material housing	PUR
insulation single lead	Polyolefin
single lead structure	7-drahtig AWG 22/7
cable sheath Ø	6.7
conductor resistance	55Ω/Km
temperature range cable movable c from	-20
temperature range cable movable c to	60
temperature range cable fixed c from	-40
temperature range cable fixed c to	80
bending radius cable fixed	mind. 35 mm
bending radius cable movable	mind. 100 mm
approval	Profinet, UL
cable diameter	6.7



fastening thread: PG 9, number of pins: 4,  
flange socket, screwed from front, with Profinet  
cable shielded

Product Flange plug connector, PG 9, screwed from front, with Profinet cable, shielded  
Area M12 connectors D-Coding serie 825/876

Pole 4  
Article number 70 3734 706 04

Date: 2014-07-20 - Page 2 of 2

Installation instructions / Mounting cutout

Mit Fläche als Verdrehenschutz  
With flats as anti-rotation device



Mit Durchgangsbohrung  
With bore hole



	c
PG 9	15,3
M16x1,5	16,1

Anzugsdrehmoment/Tightening moment

Metallgehäuse/Metal housing 6,25 Nm  
Kunststoffgehäuse/Plastic housing 3,75 Nm