


Product Area	Pluggable 4-way interface box M5 Distributors for sensors and actors	serie 772	Pole	4/3
			Article number	72 6325 00 04


**Belegungspläne**



**illustration**

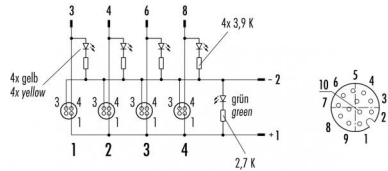

**scale drawing**

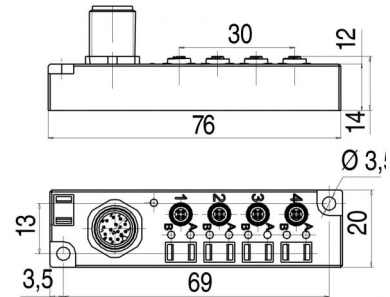

**Technical data**

**Common values**

Connector Design	Distributor
Termination	pluggable M12
Wire gauge (mm)	E/A's 0,14, supply unit 2x0,25 mm <sup>2</sup>
Wire gauge (AWG)	E/A's 26, supply unit 24
Upper temperature	+80 °C
Lower temperature	-25 °C

**Electrical values**

Rated voltage	24 V
Rated impulse voltage	500 V
Pollution degree	3
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 68

**Material**

Material of contact	CuSn (bronze)
Contact plating	Au (gold)
Material of contact body	PA
Material of housing	PA (UL 94 V-0)

**Cable data**

insulation single lead	-
single lead structure	-
bending radius cable fixed	-
bending radius cable movable	-

Contacts 4/3: Pluggable 4-way interface box

