


Product Area Male cable connector M12 x 1 – female angled connector with LED PNP NOC M8 x 1
Connecting cables - sensor connectors serie 765

Pole 3
Article number 79 5011 20 03


Belegungspläne



illustration





scale drawing

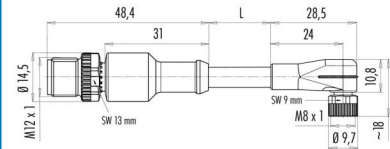

Contact Arrangement

Stifteinsatz M12
Male insert M12

Buchseneinsatz M8
Female insert M8



- 1 braun/brown
- 3 blau/blue
- 4 schwarz/black

Technical data

Common values

Connector Design	Connecting cable
Connector locking system	Screw
Termination	crimp, overmoulded on cable
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Upper temperature	+85 °C
Lower temperature	-25 °C

Material

Material of contact	Stift/ CuZn brass), socket/ CuSn (bronze)
Contact plating	Au (gold)
Material of contact body	PUR
Material of housing	PUR

Cable data

Contacts 3: Cable length 2 m, male cable connector M12 x 1 – female angled connector M8 x 1 with LED PNP NOC, cable 3 x 0,25 PUR

Electrical values

Rated voltage	30 V
Rated impulse voltage	500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 67
Mechanical operation	>100 mating cycles

