


Product **Zweifachverteiler, umspritzt LED, 2 Dosen M8x1**  
 Area **Connecting cables - sensor connectors** serie 765

Pole **3**  
 Article number **79 5232 33 04**


**Belegungspläne**

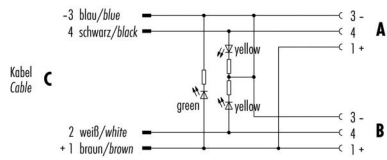


**illustration**




**scale drawing**

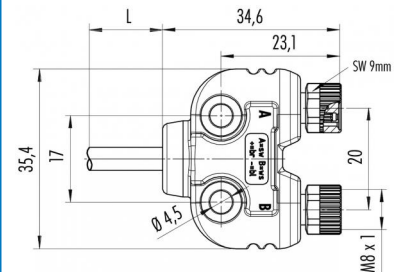

**Contact Arrangement**



2x Buchseneinsatz M8  
 2x female insert M8



**Technical data**

**Common values**

Termination	crimp, overmoulded on cable
Wire gauge (mm)	0,25 mm <sup>2</sup>
Wire gauge (AWG)	24
Cable outlet	-
Upper temperature	+85 °C
Lower temperature	-25 °C

**Material**

Material of contact body	PUR
Material of housing	PUR

**Cable data**

Polzahl: 4, Zweifachverteiler, umspritzt LED, 2 Dosen M8x1

**Electrical values**

Rated voltage	30 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 68
Mechanical operation	>100 mating cycles

