


Product Area Zweifachverteiler, umspritzt LED, 2 Dosen M12x1
Connecting cables - sensor connectors serie 765

Pole 3
Article number 79 5236 33 04


Belegungspläne

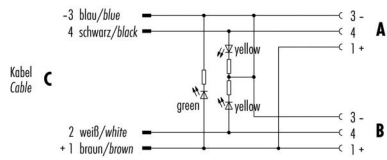


illustration




scale drawing

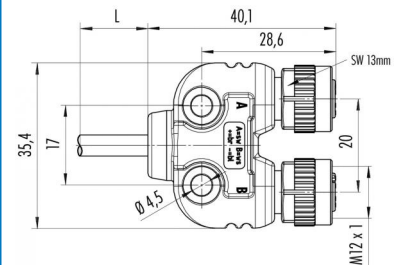

Contact Arrangement



2x Buchseneinsatz M12
2x female insert M12



Technical data

Common values

Termination	crimp, overmoulded on cable
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Cable outlet	-
Upper temperature	+85 °C
Lower temperature	-25 °C

Material

Material of contact body	PUR
Material of housing	PUR

Cable data

Polzahl: 4, Zweifachverteiler, umspritzt LED, 2 Dosen M12x1

Electrical values

Rated voltage	30 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 68
Mechanical operation	>100 mating cycles

