


Product Area Zweifachverteiler, umspitzt, Stecker M12x1 - Dose M12x1
Connecting cables - sensor connectors serie 765

Pole 4
Article number 79 5238 10 04


Belegungspläne

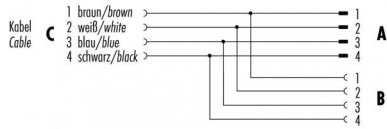


illustration




scale drawing

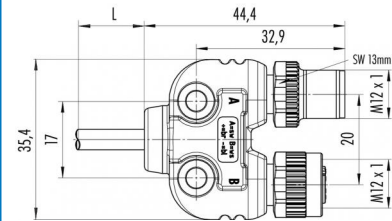

Contact Arrangement



1x Stifteinsatz M12
1x Buchseneinsatz M12
1x male insert M12
1x female insert M12



Technical data

Common values

Termination	crimp, overmoulded on cable
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Cable outlet	-
Upper temperature	+85 °C
Lower temperature	-25 °C

Material

Material of contact body	PUR
Material of housing	PUR

Cable data

Polzahl: 4, Zweifachverteiler, umspitzt, Stecker M12x1 - Dose M12x1, Kabellänge 1m

Electrical values

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 68
Mechanical operation	>100 mating cycles

