


Product	Connecting cable, Female power connector DIN EN 17530-803 - M12 male connector straight, PUR 3x0,75 mm ²	Pole	3+PE
Area	Size A	Article number	79 5702 20 04
		serie 210/A	


illustration




scale drawing

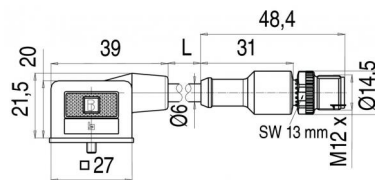

Contact Arrangement



- 3+PE**
- 1 braun/brown
 - 2 blau/blue
 - 3 schwarz/black
 - ⊕ grün/gelb/green/yellow



- M12**
- 1 braun/brown
 - 2 blau/blue
 - 4 schwarz/black
 - 5 grün/gelb/green/yellow

Technical data

Common values

Connector Design	Connecting cable
Connector locking system	central screw
Termination	IDT connection, crimp, overmoulded on cable
Wire gauge (mm)	0,75 mm ²
Wire gauge (AWG)	20
Upper temperature	+85 °C
Lower temperature	-25 °C

Electrical values

Rated voltage	250 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40 °C)	4 A
Volume resistivity	≤ 15 mΩ
EMV compliance	not shielded
Degree of protection	IP 67
Mechanical operation	> 50 mating cycles

Material

Material of contact	CuSn (bronze), CuZn (brass)
Contact plating	Sn (tin)/ Au (gold)
Material of contact body	PA
Material of housing	PC

Cable data

material housing	PUR
insulation single lead	PVC
single lead structure	24 x 0,2 Cu
cable sheath Ø	6
conductor resistance	26Ω/Km
temperature range cable movable c from	-5
temperature range cable movable c to	70
temperature range cable fixed c from	-25
temperature range cable fixed c to	70
bending radius cable fixed	30 mm
bending radius cable movable	60 mm
cable diameter	6



Contacts: 3+PE, Cable length 2 m, Connecting cable, Female power connector DIN EN 17530-803 - M12 male connector straight, PUR 3 x 0,75 mm²