


Product female cable connector, injection-moulded cable
Area Snap-in connectors IP 67 serie 620

Pole 8
Article number 79 9258 020 08


illustration



scale drawing

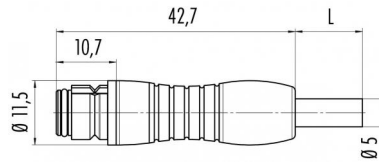

Contact Arrangement



- | | |
|---|-------------|
| 1 | weiß/white |
| 2 | braun/brown |
| 3 | grün/green |
| 4 | gelb/yellow |
| 5 | grau/grey |
| 6 | rosa/pink |
| 7 | blau/blue |
| 8 | rot/red |

You can find the item description on the next page.

Technical data

Common values

Connector Design	Female cable connector
Termination	overmoulded on cable
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Cable outlet	-
Upper temperature	+70 °C
Lower temperature	-40 °C

Electrical values


Rated voltage	63 V
Rated impulse voltage	800 V
Pollution degree	2
Overvoltage category	II
Material group	II
Rated current (40 °C)	1 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 67
Mechanical operation	>500 mating cycles

Material

Material of contact	CuSn (bronze)
Contact plating	Au (gold)
Material of contact body	PA (UL 94 V-0)
Material of housing	PUR

Cable data

material housing	PVC
insulation single lead	PVC
single lead structure	32 x 0,1 mm
cable sheath Ø	5.7
conductor resistance	72 Ω/km (20 °C)
temperature range cable movable c from	-5
temperature range cable movable c to	70
temperature range cable fixed c from	-40
temperature range cable fixed c to	70
bending radius cable fixed	28
bending radius cable movable	57
approval	-



Number of pins: 8, female cable connector, injection-moulded cable

Product female cable connector, injection-moulded cable
Area Snap-in connectors IP 67 serie 620

Pole 8
Article number 79 9258 020 08

Date: 2014-07-20 - Page 2 of 2

Item description

