


Product Female cable connector with cable clamp, cable outlet 4-6 mm  
Area M16 connectors IP 40 serie 581

Pole 3 DIN  
Article number 99 2006 10 03


#### illustration



#### scale drawing

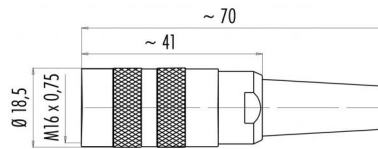

#### Contact Arrangement



	X	Y
1	-3,50	0,00
2	0,00	3,50
3	3,50	0,00

#### Attenuation characteristic



You can find the item description on the next page.

#### Technical data

##### Common values

Connector Design	Female cable connector
Connector locking system	Screw
Termination	solder
Wire gauge (mm)	0,75 mm <sup>2</sup>
Wire gauge (AWG)	20
Cable outlet	4 - 6 mm
Upper temperature	+85 °C
Lower temperature	-40 °C

##### Material


Material of contact	CuSn (bronze)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)
Material of housing	CUZn (brass nickel plated)

##### Cable data

Contacts 3 DIN, female cable connector with cable clamp, shieldable, cable outlet 4 - 6 mm, silver plated contacts

##### Electrical values

Rated voltage	250 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	7 A
Volume resistivity	≤ 5 mΩ
EMV compliance	shielded
Degree of protection	IP 40
Mechanical operation	>500 mating cycles



Product Female cable connector with cable clamp, cable outlet 4-6 mm  
Area M16 connectors IP 40 serie 581

Pole 3 DIN  
Article number 99 2006 10 03

Date: 2014-07-20 - Page 2 of 2

Item description

