


Product	Connector for distribution, assembly possible, M12 outlet, further parts can be added, lower part without fixing straps	Pole	2
Area	AS-Interface components	Article number	99 6433 00 02

illustration



scale drawing

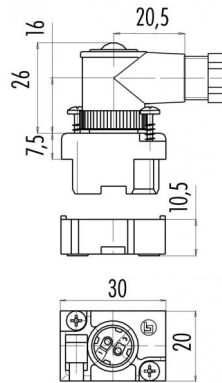

You can find the item description on the next page.

Technical data

Common values

Connector Design	flat cable clamp
Connector locking system	Connector for distribution
Termination	solder, wires
Wire gauge (mm)	0,25 mm <sup>2</sup>
Wire gauge (AWG)	24
Cable outlet	6 - 8 mm
Upper temperature	+70 °C
Lower temperature	-25 °C

Electrical values

Rated voltage	30 V
Pollution degree	3
Rated current (40°C)	2 A (per contact)
Volume resistivity	≤ 8 mΩ
Degree of protection	IP 67
Mechanical operation	Max. 10 mating cycles


Material

Material of contact	CuZn (brass)
Contact plating	Sn (tin)
Material of contact body	PA
Material of housing	PA

Cable data

insulation single lead	-
single lead structure	-
bending radius cable fixed	-
bending radius cable movable	-

Cable outlet 6 - 8 mm, Contacts 2: Connector for distribution, assembly possible, M12 outlet, further parts can be added, lower part without fixing straps



Product	Connector for distribution, assembly possible, M12 outlet, further parts can be added, lower part without fixing straps	Pole	2
Area	AS-Interface components	serie 775	Article number 99 6433 00 02

Item description

