


Product Area	Socket for distribution, 2x0,25 mm <sup>2</sup> , PG 9, positioning possible, flat cable termination AS-Interface components serie 775	Pole	2
		Article number	99 6441 105 02

illustration



scale drawing

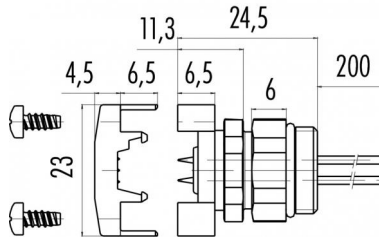

You can find the item description on the next page.

Technical data

Common values

Connector Design	flange clamp
Connector locking system	Connector for distribution
Upper temperature	+70 °C
Lower temperature	-25 °C

Material

Material of contact	CuZn (brass)
Contact plating	Sn (tin)/ Au (gold)
Material of contact body	PA
Material of housing	PA


Electrical values

Pollution degree	3
Rated current (40 °C)	2 A (per contact)
Volume resistivity	≤ 8 mΩ
Degree of protection	IP 67
Mechanical operation	Max. 10 mating cycles

Cable data

insulation single lead	-
single lead structure	-
bending radius cable fixed	-
bending radius cable movable	-

Contacts 2: Socket for distribution, 2 x 0,25 mm<sup>2</sup>, M20 x 1,5 positioning possible, flat cable termination



Product Area Socket for distribution, 2x0,25 mm<sup>2</sup>, PG 9, positioning possible, flat cable termination  
AS-Interface components serie 775

Pole 2  
Article number 99 6441 105 02

Date: 2014-07-20 - Page 2 of 2

Item description

