


Product Area Female cable connector, flat cable termination, with label ad fixing screws
AS-Interface components serie 775

Pole 2
Article number 99 6442 00 02

illustration



scale drawing

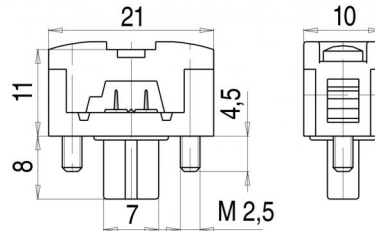

Technical data

Common values

Connector Design	AS-Interface Connector
Connector locking system	Connector for distribution
Upper temperature	+70 °C
Lower temperature	-25 °C

Material

Material of contact	CuZn (brass)
Contact plating	Sn (tin)/ Au (gold)
Material of contact body	PA
Material of housing	PA

Electrical values

Rated voltage	30 V
Pollution degree	3
Rated current (40 °C)	2 A (per contact)
Volume resistivity	≤ 8 mΩ
Degree of protection	IP 67
Mechanical operation	Max. 10 mating cycles

Cable data

insulation single lead	-
single lead structure	-
bending radius cable fixed	-
bending radius cable movable	-

Contacts 2: Female cable connector, flat cable termination, with label and fixing screws

