


| | | | |
|--------------|---|----------------|---------------|
| Product Area | Female cable connector, cable outlet 6 - 8 mm, black Snap-in connectors IP 67 serie 720 | Pole | 8 |
| | | Article number | 99 9126 02 08 |


illustration



scale drawing

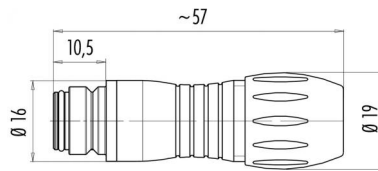

Contact Arrangement



| | X | Y |
|---|-------|-------|
| 1 | 1,35 | -2,79 |
| 2 | -1,35 | -2,79 |
| 3 | -3,02 | -0,69 |
| 4 | -2,43 | 1,93 |
| 5 | 0,00 | 3,10 |
| 6 | 2,43 | 1,93 |
| 7 | 3,02 | -0,69 |
| 8 | 0,00 | 0,00 |

You can find the item description on the next page.

Technical data

Common values

| | |
|--------------------------|------------------------|
| Connector Design | Female cable connector |
| Connector locking system | Snap-in locking |
| Termination | solder |
| Wire gauge (mm) | 0,25 mm ² |
| Wire gauge (AWG) | 24 |
| Cable outlet | 6 - 8 mm |
| Upper temperature | +85 °C |
| Lower temperature | -40 °C |

Material


| | |
|--------------------------|----------------|
| Material of contact | CuSn (bronze) |
| Contact plating | Au (gold) |
| Material of contact body | PA (UL 94 V-0) |
| Material of housing | PA (UL 94 V-0) |

Cable data

Contacts 8, female cable connector, black,
cable outlet 6 - 8 mm

Electrical values

| | |
|-----------------------|--------------------|
| Rated voltage | 125 V |
| Rated impulse voltage | 1500 V |
| Pollution degree | 2 |
| Overvoltage category | II |
| Material group | II |
| Rated current (40°C) | 2 A |
| Volume resistivity | ≤ 3 mΩ |
| EMV compliance | not shielded |
| Degree of protection | IP 67 |
| Mechanical operation | >500 mating cycles |



Product Area Female cable connector, cable outlet 6 - 8 mm, black
Snap-in connectors IP 67 serie 720

Pole 8
Article number 99 9126 02 08

Date: 2014-07-20 - Page 2 of 2

Item description

