

Bulkhead Jack—Heli-Grip® for Flexible Cable


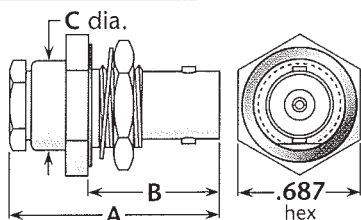


Figure 1 (Rear mount)

Heli-Grip® Cable Attachment




These connectors have captivated contacts and allow rapid, easy assembly—simply trim the cable, slide into the cone/insulator/contact assembly (left), solder the center conductor to the contact, and screw body assembly (right) onto cable assembly.

Cable Group	Fig.	Dimensions			Mounting Figure	Max. Panel	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C			Body	Contact		
5, 6 ^s	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1016-018-N595	E/03
RG-223	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1016-015-N595	E/03
7	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1016-019-N595	E/03
8A	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1016-029-N595	E/03
8B	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1016-043-N595	E/03
9	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1016-037-N595	E/03
10	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1016-100-N595-2	E/03
11	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1016-038-N595-2	E/03

^sExcept RG-223/U.

Bulkhead Jack—Crimp Type for Flexible Cable


Figure 1 (Rear mount)

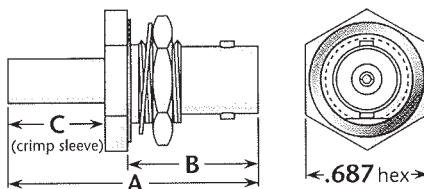

Cable Group	Fig.	Dimensions			Mounting Figure	Max. Panel	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C			Body	Contact		
5	1	1.31	.68	.50	59	.11	Nickel	Silver	1019-016-N590	B/21
6	1	1.31	.68	.50	59	.11	Nickel	Silver	1019-013-N590	B/21
7	1	1.31	.68	.50	59	.11	Nickel	Silver	1019-020-N590	B/22

Bulkhead Jack—Solder-Clamp for Semi-Rigid Cable

Figure 1 (Rear mount)

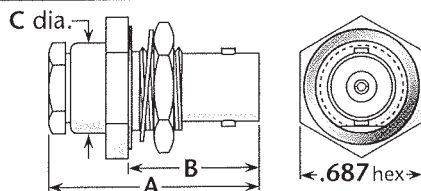

Cable Group	Fig.	Dimensions			Mounting Figure	Max. Panel	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C			Body	Contact		
13	1	1.16	.81	.50	59	.24	Nickel*	Silver	1016-031-N593	F/08
14	1	1.16	.81	.50	59	.24	Nickel*	Silver	1016-025-N593	F/07

* Solder ferrule is gold plated.

See page 204 for cable groups. • Assembly procedures start on page 205. • See page 203 for mounting dimensions. (C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.