


PressMount Receptacles

Delta PressMount Receptacles

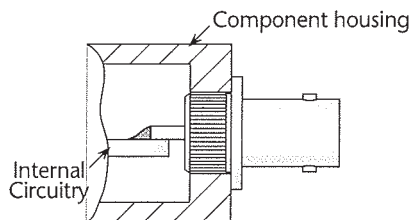

These connectors eliminate the need for complicated mounting hole patterns and mounting hardware. They are simply pressed into a single through hole, and the precisely-engineered knurled mounting section provides retention strength far greater than normal mating and unmating forces. An integral shoulder provides a positive stop when mounting.

PressMounts are available for a wide variety of Delta connector series, and can be used in packages as small as the outer diameter of the connector body.

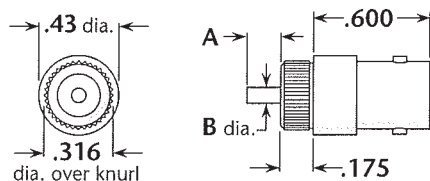


Figure 1
(Post contact)

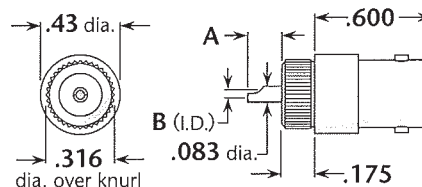


Figure 2
(Solder pot contact)

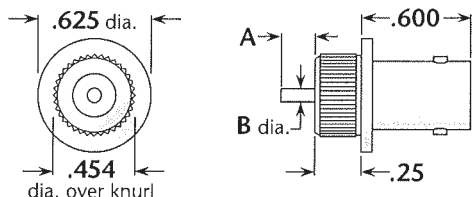


Figure 3
(Post contact)

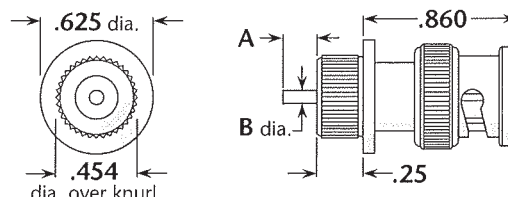


Figure 4
(Plug type, post contact)

| Figure | Dimensions | | Min. Panel | Mounting Hole | Plating | | Delta P/N |
|--------|------------|------|------------|-----------------|---------|------------|------------------|
| | A | B | | | Body | Contact | |
| 1 | .062 | .050 | .150 | .312 ±.001 dia. | Nickel | Silver (C) | 1020-000-N911-1 |
| 2 | .285 | .062 | .150 | .312 ±.001 dia. | Nickel | Silver (C) | 1020-000-N911-2 |
| 3 | .060 | .050 | .200 | .450 ±.001 dia. | Nickel | Gold (C) | 1020-000-N911-13 |
| 4 | .060 | .050 | .200 | .450 ±.001 dia. | Nickel | Gold (C) | 1024-000-N911-4 |

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.
All items are available with other flange sizes and contact configurations.