



Right Angle Plug—Heli-Grip® for Flexible Cable

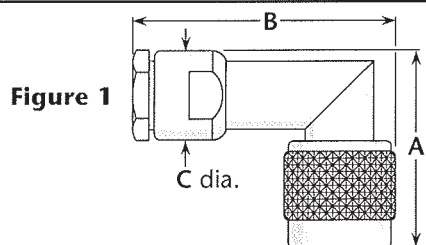

Heli-Grip® Cable Attachment




These connectors have captivated contacts and allow rapid, easy assembly—simply trim the cable, slide into the cone/insulator/contact assembly (left), solder the center conductor to the contact, and screw body assembly (right) onto cable assembly.

Cable Group	Figure	Dimensions			Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C	Body	Contact		
5, 6 [§]	1	1.06	1.65	.50	Nickel	Silver (C)	1204-018-N005	E/03
RG-223	1	1.06	1.65	.50	Nickel	Silver (C)	1204-015-N005	E/03
7	1	1.06	1.65	.50	Nickel	Silver (C)	1204-019-N005	E/03
8A	1	1.06	1.65	.50	Nickel	Silver (C)	1204-029-N005	E/03
8B	1	1.06	1.65	.50	Nickel	Silver (C)	1204-043-N005	E/03
9	1	1.06	1.65	.50	Nickel	Silver (C)	1204-037-N005	E/03
10	1	1.06	1.65	.50	Nickel	Silver (C)	1204-100-N005	E/03
11	1	1.06	1.65	.50	Nickel	Silver (C)	1204-038-N005	E/03


[§]Except RG-223/U.

Right Angle Plug—Crimp Type for Flexible Cable

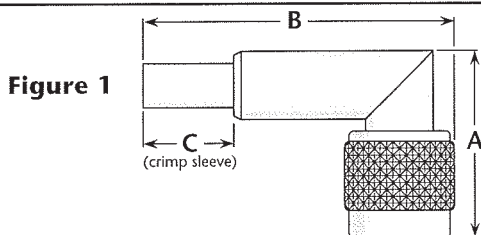

Cable Group	Figure	Dimensions			Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C	Body	Contact		
5	1	1.03	1.72	.50	Nickel	Gold	1207-017-N000	B/02
6	1	1.03	1.72	.50	Nickel	Gold	1207-015-N000	B/02
7	1	1.03	1.72	.50	Nickel	Gold	1207-020-N000	B/02

Right Angle Plug—Solder-Clamp for Semi-Rigid Cable

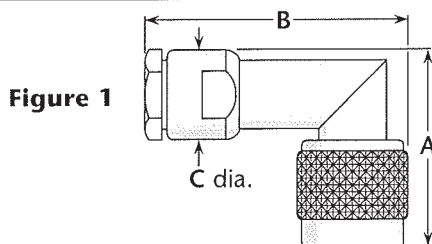

* Solder ferrule is gold plated.

Cable Group	Figure	Dimensions			Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C	Body	Contact		
13	1	1.06	1.65	.50	Nickel*	Gold	1204-031-N003	F/08
14	1	1.06	1.65	.50	Nickel*	Gold	1204-025-N003	F/07

See page 204 for cable groups. • Assembly procedures start on page 205.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.