Power connectors




Product description RD24 Female panel mount connector, Contacts: 6+PE, unshielded, screw clamp, IP67

Area RD24 series 692 Part no. 09 0220 00 07

Illustration

Scale drawing

Contact arrangement (Plug-in side)

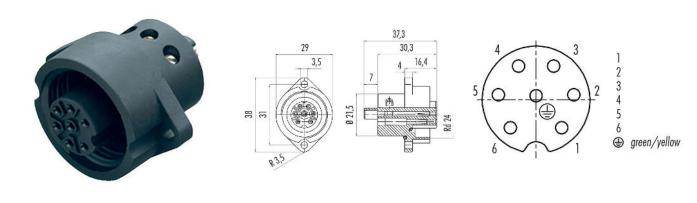

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	09 0220 00 07
Connector design	Female panel mount connector
Version	Connector socket straight
Connector locking system	screw
Termination	screw clamp
Degree of protection	IP67
Cross-sectional area	max. 1.50 mm² / AWG 16
Temperature range from/to	-40 °C / 100 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	25.14
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	4000 V
Rated current	10.0 A
Insulation resistance	≥ 10¹∅ Ω
Pollution degree	3
Overvoltage category	III
Insulating material group	III
EMC compliance	unshielded

Material

Contact body material	PBT	

Power connectors



Product description RD24 Female panel mount connector, Contacts: 6+PE, unshielded, screw clamp, IP67


Area RD24 series 692 Part no. 09 0220 00 07

Contact materialCuSn (bronze)Contact platingAg (silver)REACH SVHCCAS 7439-92-1 (Lead)SCIP number440bb629-4194-4da8-888c-1dafa10c7a1e

Classifications

eCl@ss 11.1	27-44-01-09
ETIM 9.0	EC003569

Assembly instructions / Panel cut-out

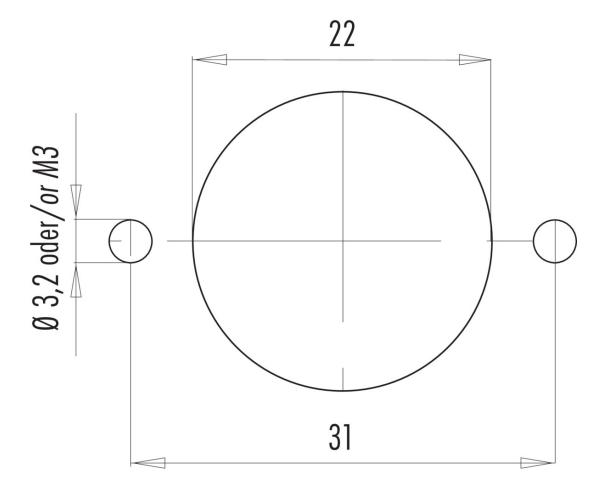

Power connectors




Product description

RD24 Female panel mount connector, Contacts: 6+PE, unshielded, screw clamp, IP67

Area Part no. RD24 series 692 09 0220 00 07

Derating curve

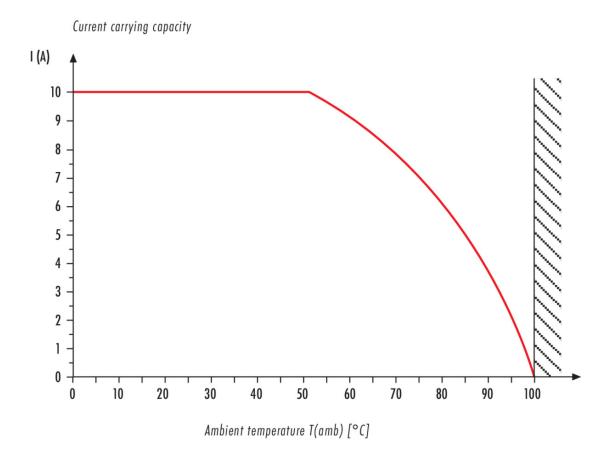

Power connectors



Product description RD24 Female panel mount connector, Contacts: 6+PE, unshielded, screw clamp, IP67

Area RD24 series 692 Part no. 09 0220 00 07

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.