


Product description	M5 Female cable connector, Contacts: 4, unshielded, moulded on the cable, IP67, UL, M5x0.5, PUR, black, 4 x 0.25 mm², 2 m
-	-
Area	M5 series 707
Part no.	77 3450 0000 50004-0200


Illustration



Scale drawing

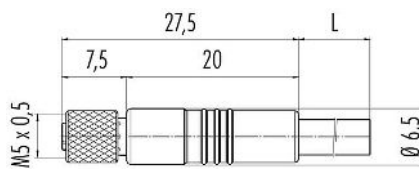

Contact arrangement (Plug-in side)

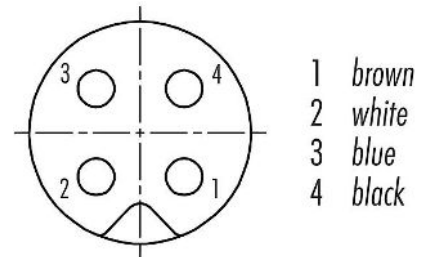

Technical data

General features

Part no.	77 3450 0000 50004-0200
	Alternative part no.: 79 3108 32 04
Notice	Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.
Connector design	Female cable connector
Type standard	DIN EN 61076-2-105
Cable length	2 m
Version	Connector socket straight
Connector locking system	screw
Termination	moulded on the cable
Degree of protection	IP67
Cross-sectional area	0.25 mm ² / AWG 24
Temperature range from/to	-25 °C / 80 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	259
Customs tariff number	85444290
Country of Origin	DE

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Rated current	1.0 A
Insulation resistance	> 10 ¹⁰ Ω
Pollution degree	3
Overvoltage category	II
Insulating material group	I
EMC compliance	unshielded

Product description	M5 Female cable connector, Contacts: 4, unshielded, moulded on the cable, IP67, UL, M5x0.5, PUR, black, 4 x 0.25 mm², 2 m
-	-
Area	M5 series 707
Part no.	77 3450 0000 50004-0200

Material

Housing material	PUR
Contact body material	PUR
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	478b512a-1251-4bda-ab33-ee5ff3843caf

Authorization/approvals

Approvals	UL
-----------	----

Classifications

eCl@ss 11.1	27-06-03-11
ETIM 9.0	EC002638

Cable data - Structure of the cable

Cable diameter	4.0 mm
Cross section	4 x 0.25 mm ²
Sheath material	PUR
Single-lead insulation	PVC
Single-lead structure	32 x 0.10 mm
Cable color	black

Cable data - Electrical properties

Conductor resistance	79.9 Ω/Km (20°C)
----------------------	------------------

Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
Bending radius, moving cable	≥ 10 x Ø

Cable data - Thermal properties

Temperature range cable in move from/to	-5 °C / 80 °C
Temperature range cable fixed from/to	-25 °C / 80 °C

Cable data - Other features

Halogen free	yes
--------------	-----

Product description	M5 Female cable connector, Contacts: 4, unshielded, moulded on the cable, IP67, UL, M5x0.5, PUR, black, 4 x 0.25 mm², 2 m
-	-
Area	M5 series 707
Part no.	77 3450 0000 50004-0200

General Disclaim Notice

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).