

Product data sheet

Automation technology - Data transmission




Product description	M12 Female panel mount connector, Contacts: 4, shieldable, THR, IP67, UL
Area	M12-D series 876
Part no.	99 3732 203 04


Illustration




Conductor layout

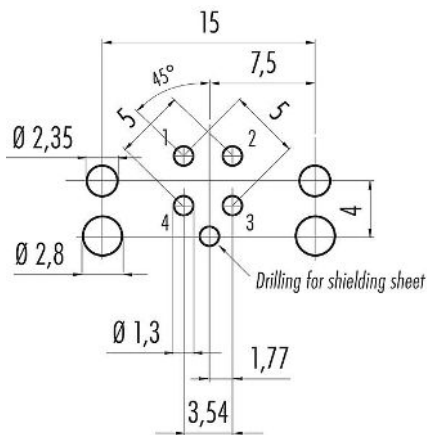

Scale drawing

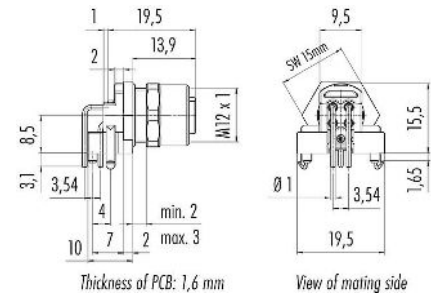

Contact arrangement (Plug-in side)

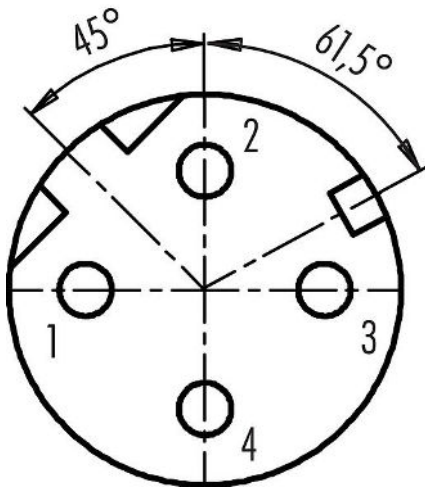

Technical data

General features

Part no.	99 3732 203 04
Connector design	Female panel mount connector
Type standard	DIN EN 61076-2-101

Product data sheet

Automation technology - Data transmission



Product description	M12 Female panel mount connector, Contacts: 4, shieldable, THR, IP67, UL
-	-
Area	M12-D series 876
Part no.	99 3732 203 04

Version	Connector socket angled
Connector locking system	screw
Termination	THR
Degree of protection	IP67
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	10.81
Customs tariff number	85369010
Country of Origin	HU

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Rated current	4.0 A
Insulation resistance	> 10 ¹⁰ Ω
Pollution degree	3
Transmission rate	CAT 5
Overvoltage category	II
Insulating material group	II
EMC compliance	shieldable
Shield connection	Shielding plate

Material

Housing material	CuZn (Brass nickel plated)
Contact body material	PA
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	3bb2aa14-3a88-4cd9-a77b-b8666a1a5e2d

Authorization/approvals

Approvals	UL
-----------	----

Classifications

eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635

Product data sheet

Automation technology - Data transmission



Product description	M12 Female panel mount connector, Contacts: 4, shieldable, THR, IP67, UL
-	-
Area	M12-D series 876
Part no.	99 3732 203 04

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.