

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL SPECIFICATIONS:

MOLDING: PHENOLIC MOLDING COMPOUND.
CONTACTS: BERYLLIUM COPPER, #25 ALLOY.

2. FINISH SPECIFICATIONS:

MOLDING: COLOR = GREEN.
CONTACTS: .000030 MIN. GOLD OVER NICKEL.



3. PERFORMANCE CHARACTERISTICS:

CURRENT RATING: 3 AMPERES MAX. PER CONTACT.

REV	DESCRIPTION	BY DATE	APPD
A	ER052670	MAR 04/21/14	DAO



SCALE 1 : 1.5

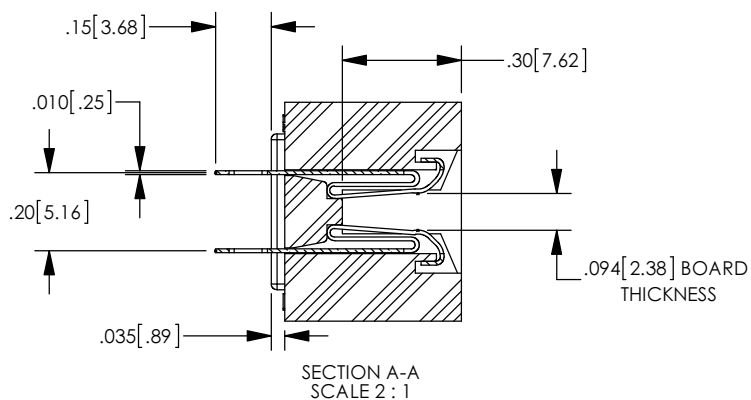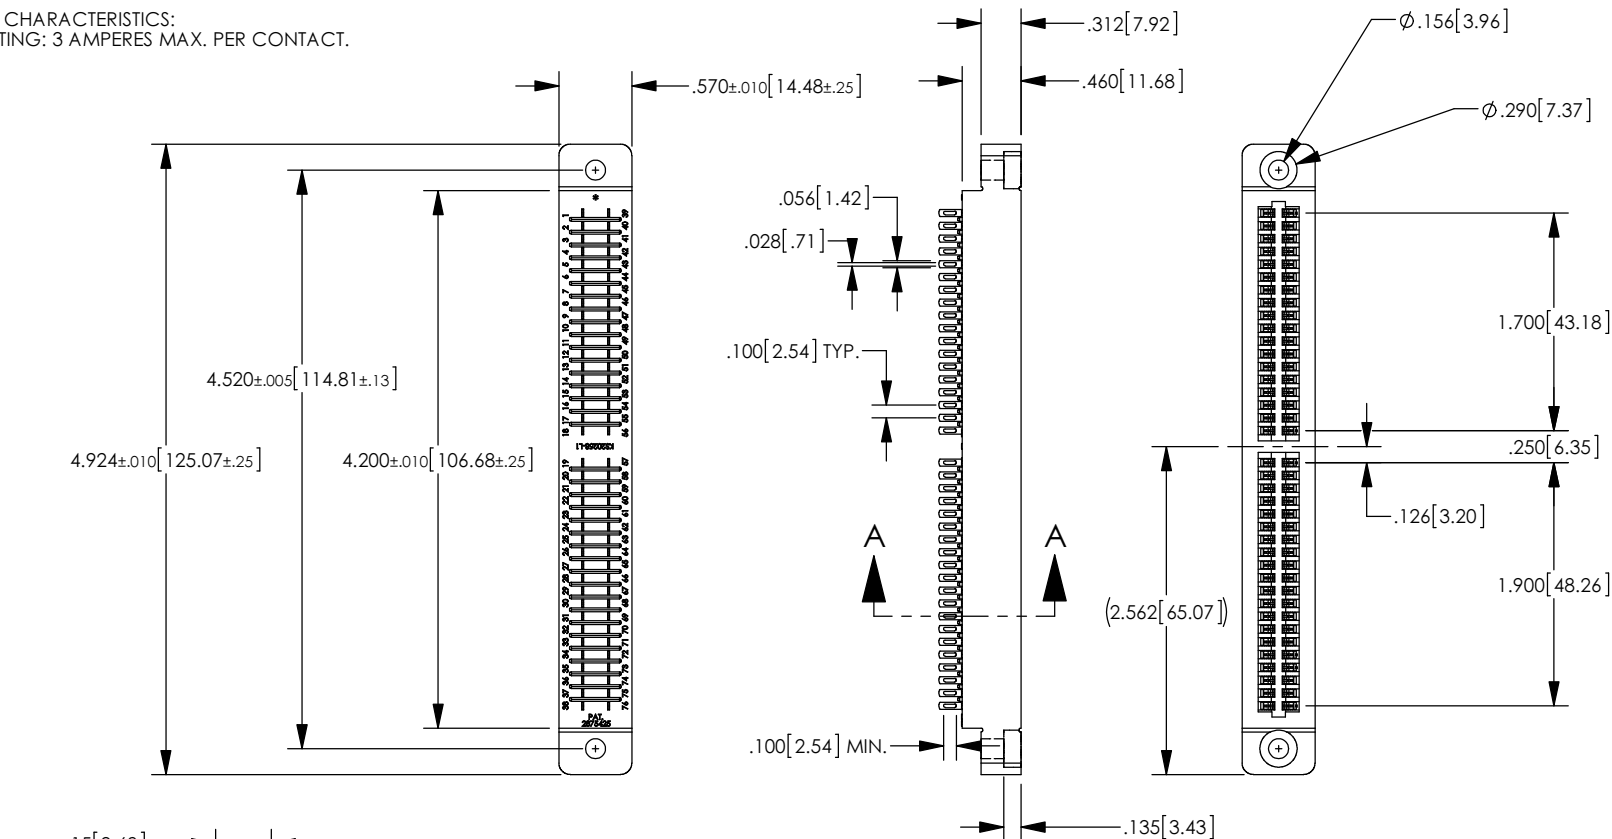

CATALOG P/N: 600-94-76XA

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .0005 [0.013] ANGLES: ± 2° SCALE: 2:3			
CUSTOMER SALES DRAWING		THIRD ANGLE	
DRAWN MAR	DATE 04/21/14	APPROVED DAO	DATE 04/21/14
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX

WINCHESTER ELECTRONICS Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middlebury, Connecticut 06762	
.100" CONTACT SPACING FOR 3/32[2.38] PRINTED CIRCUIT BOARD DUAL READOUT, 38 POSITIONS	
A	600-94-76XA
SHT 1	OF 1
REV A	