


4

3

2


1

used for: D-SUB COMBINATION



(c)


Selector settings	Crimp height A
7 for AWG 20	0.87 - 0.98
6 for AWG 22	0.77 - 0.88
5 for AWG 24	0.67 - 0.78

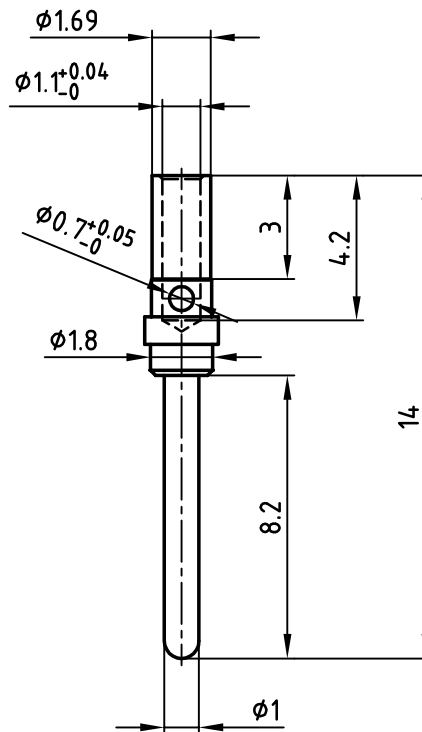

Plating	Part-NO.
min. 8µin HARD GOLD OVER min. 50µin NICKEL	131A15019X
min. 20µin HARD GOLD OVER min. 50µin NICKEL	131B15019X
min. 30µin HARD GOLD OVER min. 50µin NICKEL	131C15019X
min. 50µin HARD GOLD OVER min. 50µin NICKEL	131J15019X

Directive 2002/95/EC
"RoHS"
Compliant

(b) STRIPPING DIMENSION



NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE TABLE
- (b) 3. CRIMPING: USE CRIMP TOOL 360X10329X WITH TOOL INSERT 360X20039X
SELECTOR SETTINGS: 7 FOR AWG 20
6 FOR AWG 22
5 FOR AWG 24

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

tolerance



scale:

5:1

material:

SEE NOTES

2002

date

name

title:

SIGNAL CRIMP CONTACT

MALE CONTACT

Wire Size 20-24

1 x d

Ä 3703

02.08.2010

K.H.

d-old

1 x c

Ä 2197

01.04.2005

Lehmen

2 x b

Ä 2177

02.03.2005

Lehmen

rev.

description

date

name

CONEC®

dwg no:

AutoCAD 2000

DIN-A

16K1A470A

4

sh: 1/1

part no:

SEE TABLE

4

3

2

1